


<b>Last Modified:</b> 5-10-2010	<b>6.4 K</b>	<b>From:</b> 200908
<b>Model Year:</b> 2010	<b>Model:</b> 4Runner	<b>Doc ID:</b> RM0000030JQ008X
<b>Title:</b> AUDIO / VIDEO : MICROPHONE AMPLIFIER: COMPONENTS (2010 4Runner)		


## COMPONENTS

## ILLUSTRATION

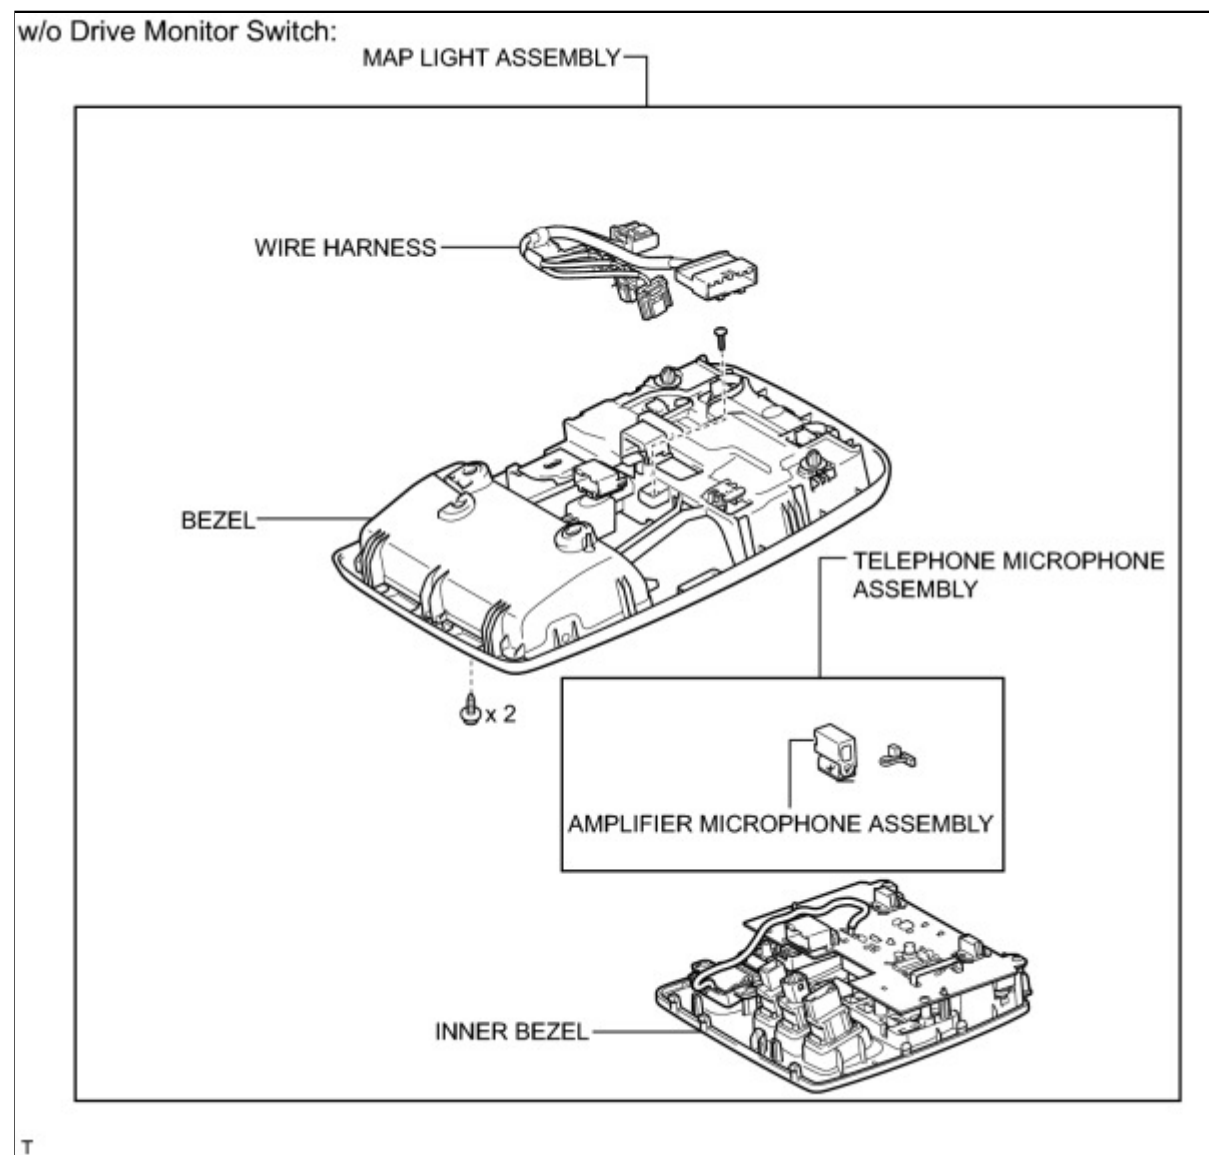

## ILLUSTRATION

w/ Drive Monitor Switch:

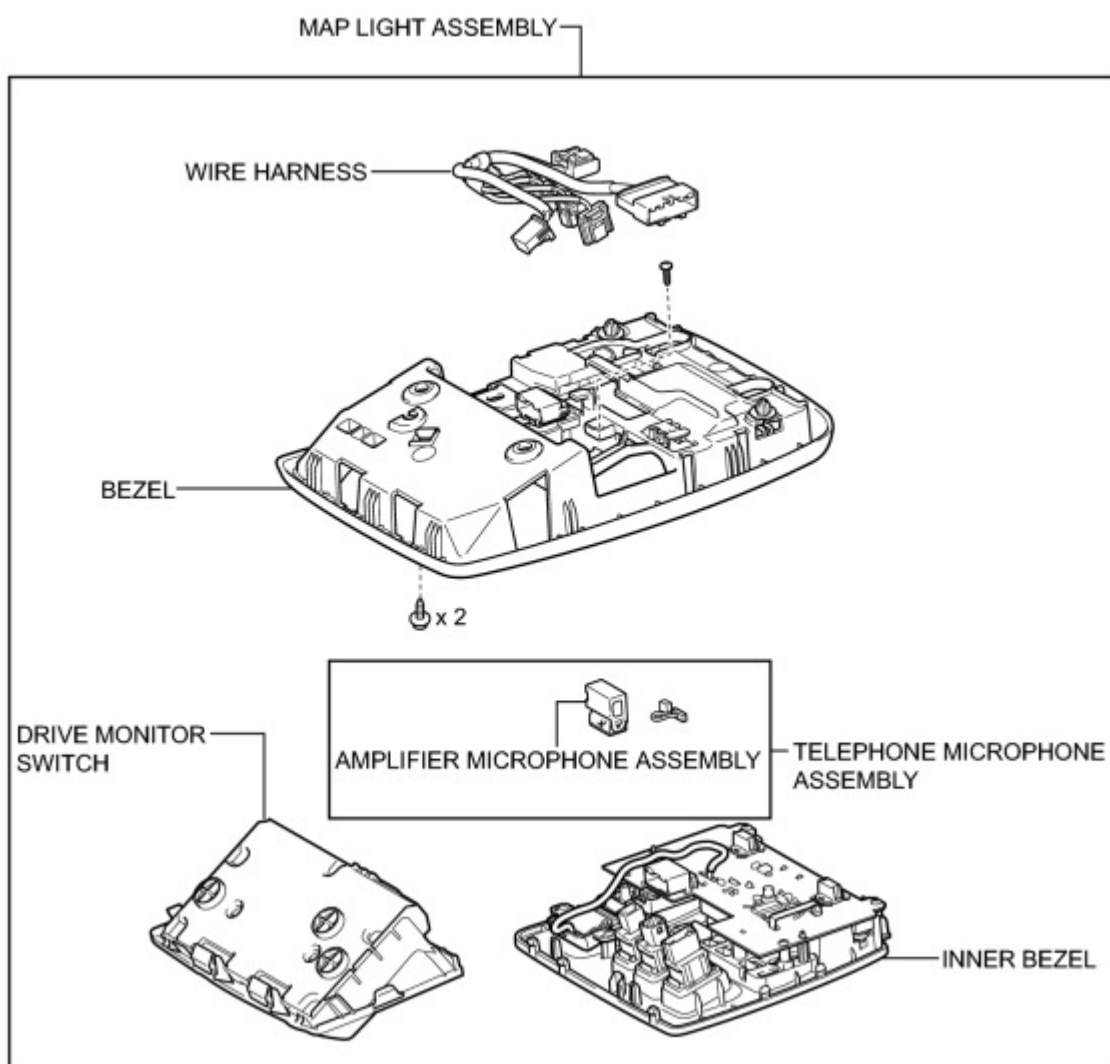

T



TOYOTA

<b>Last Modified:</b> 5-10-2010	6.4 A	<b>From:</b> 200908
<b>Model Year:</b> 2010	<b>Model:</b> 4Runner	<b>Doc ID:</b> RM0000030JR008X
<b>Title:</b> AUDIO / VIDEO : MICROPHONE AMPLIFIER: REMOVAL (2010 4Runner)		

## **REMOVAL**


### **1. REMOVE DRIVE MONITOR SWITCH**

[INFO](#)


### **2. REMOVE MAP LIGHT ASSEMBLY**

[INFO](#)


### **3. REMOVE TELEPHONE MICROPHONE ASSEMBLY**

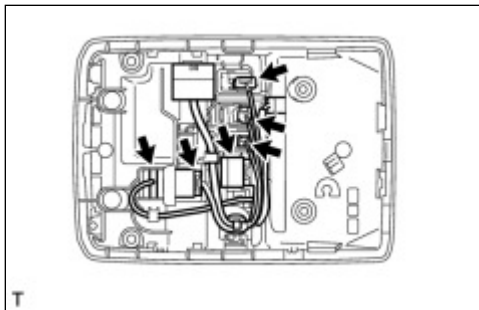

(a) Disconnect the 6 connectors.

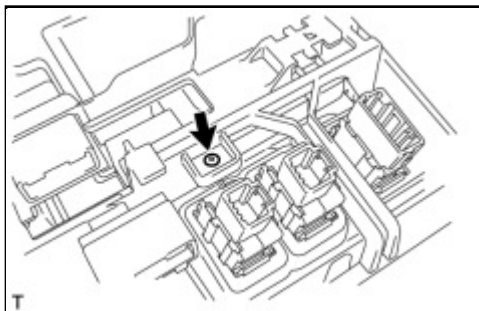


(b) Remove the screw.

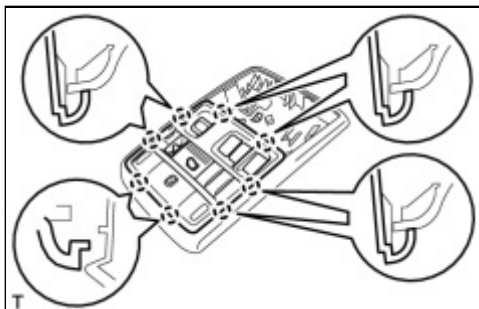


(c) Detach the 8 claws and remove the inner bezel.

(d) Disconnect the connector.

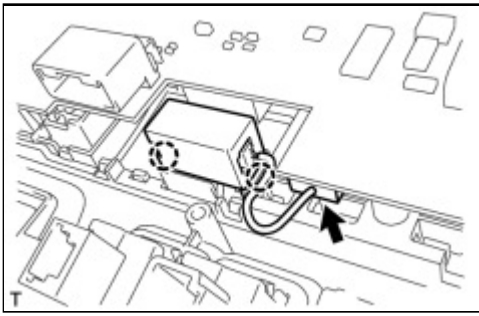

(e) Detach the 2 claws and remove the telephone microphone.

#### **4. REMOVE AMPLIFIER MICROPHONE ASSEMBLY**

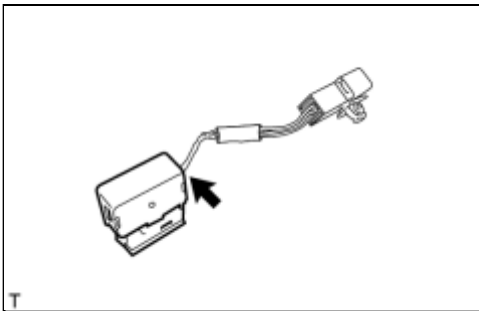

(a) Disconnect the connector and remove the amplifier microphone.



<b>Last Modified:</b> 5-10-2010	6.4 A	<b>From:</b> 200908
<b>Model Year:</b> 2010	<b>Model:</b> 4Runner	<b>Doc ID:</b> RM0000030JP008X
<b>Title:</b> AUDIO / VIDEO : MICROPHONE AMPLIFIER: INSTALLATION (2010 4Runner)		

## INSTALLATION

### 1. INSTALL AMPLIFIER MICROPHONE ASSEMBLY

- (a) Connect the connector and install the amplifier microphone.

### 2. INSTALL TELEPHONE MICROPHONE ASSEMBLY

- (a) Attach the 2 claws to install the telephone microphone.
- (b) Connect the connector.
- (c) Attach the 8 claws to install the inner bezel.
- (d) Install the screw.
- (e) Connect the 6 connectors.

### 3. INSTALL MAP LIGHT ASSEMBLY [INFO](#)

### 4. INSTALL DRIVE MONITOR SWITCH [INFO](#)