






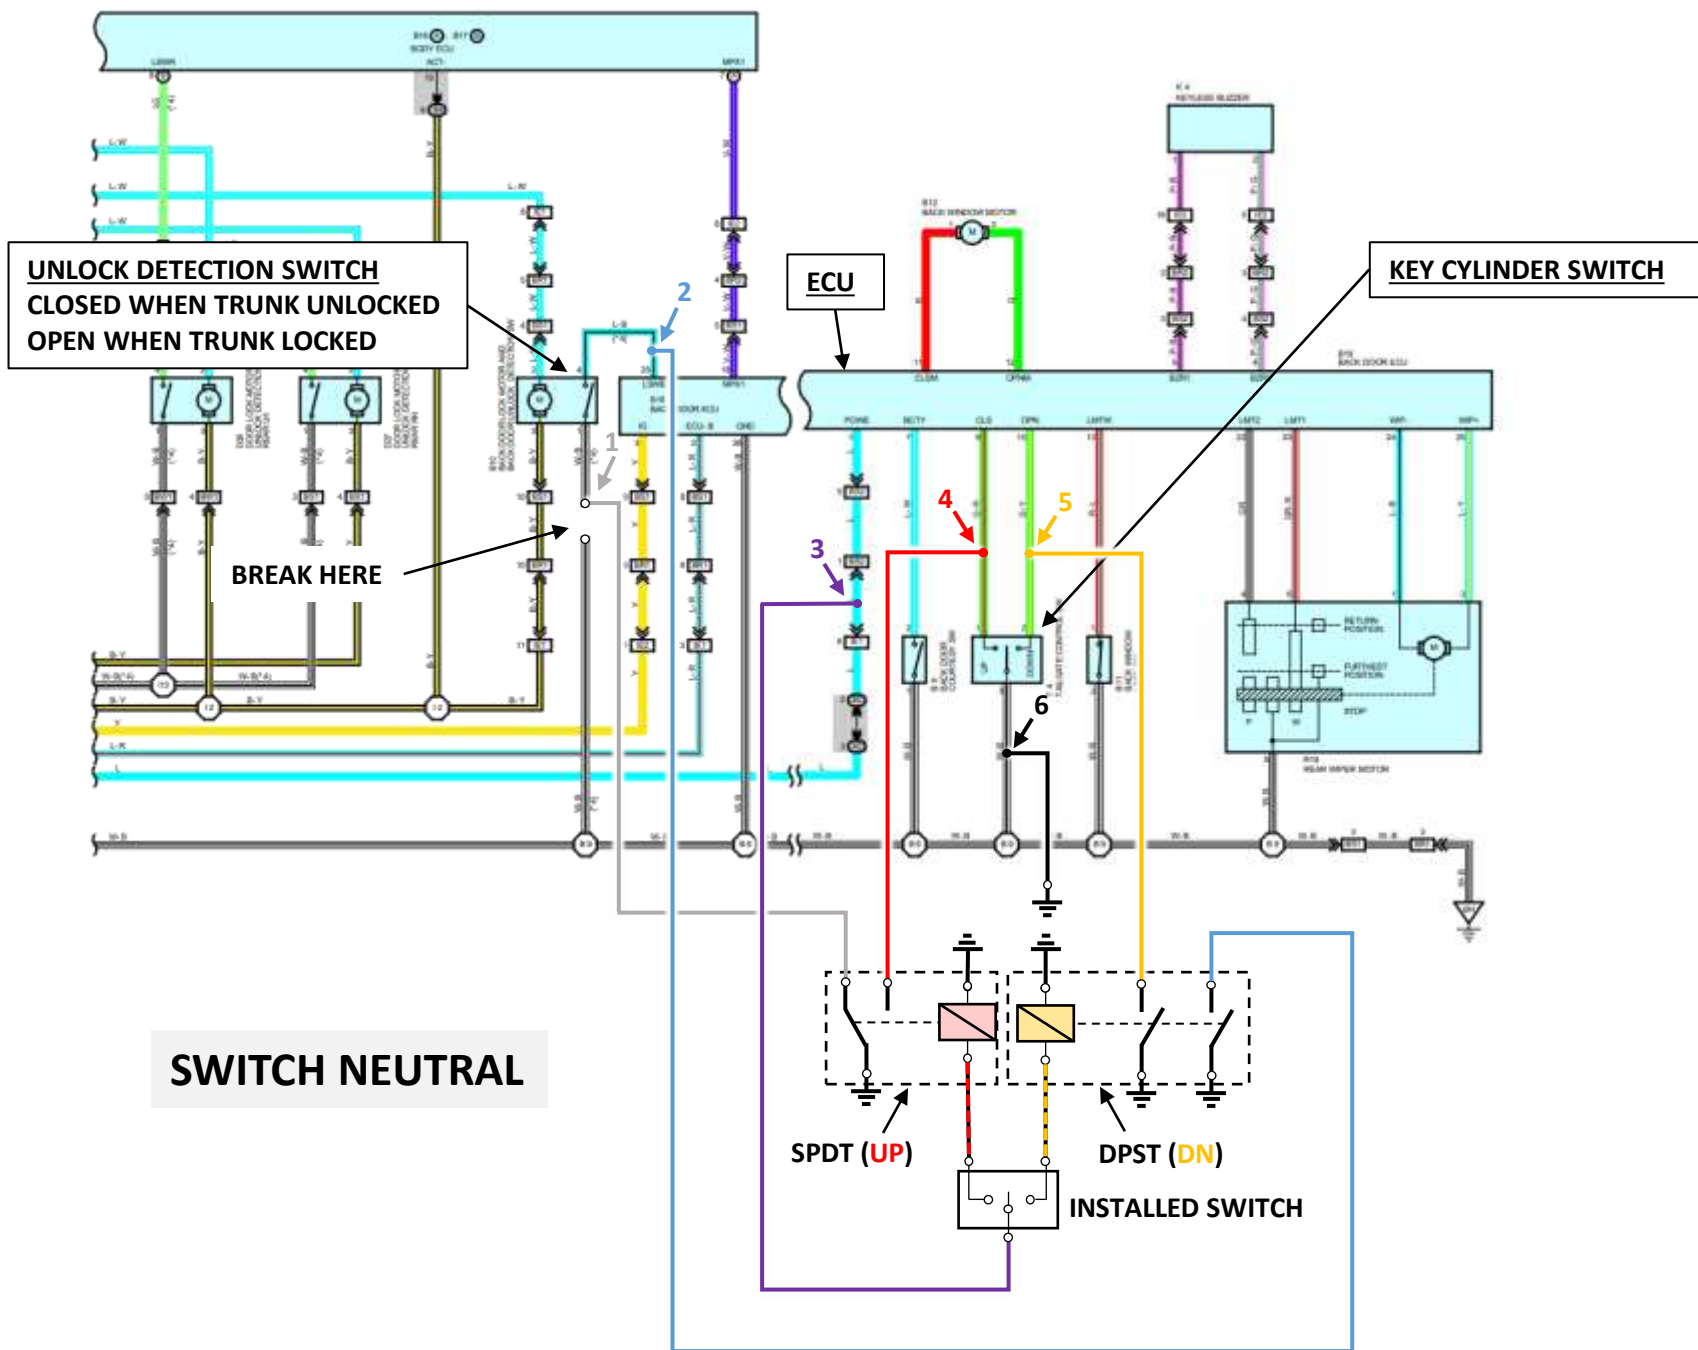

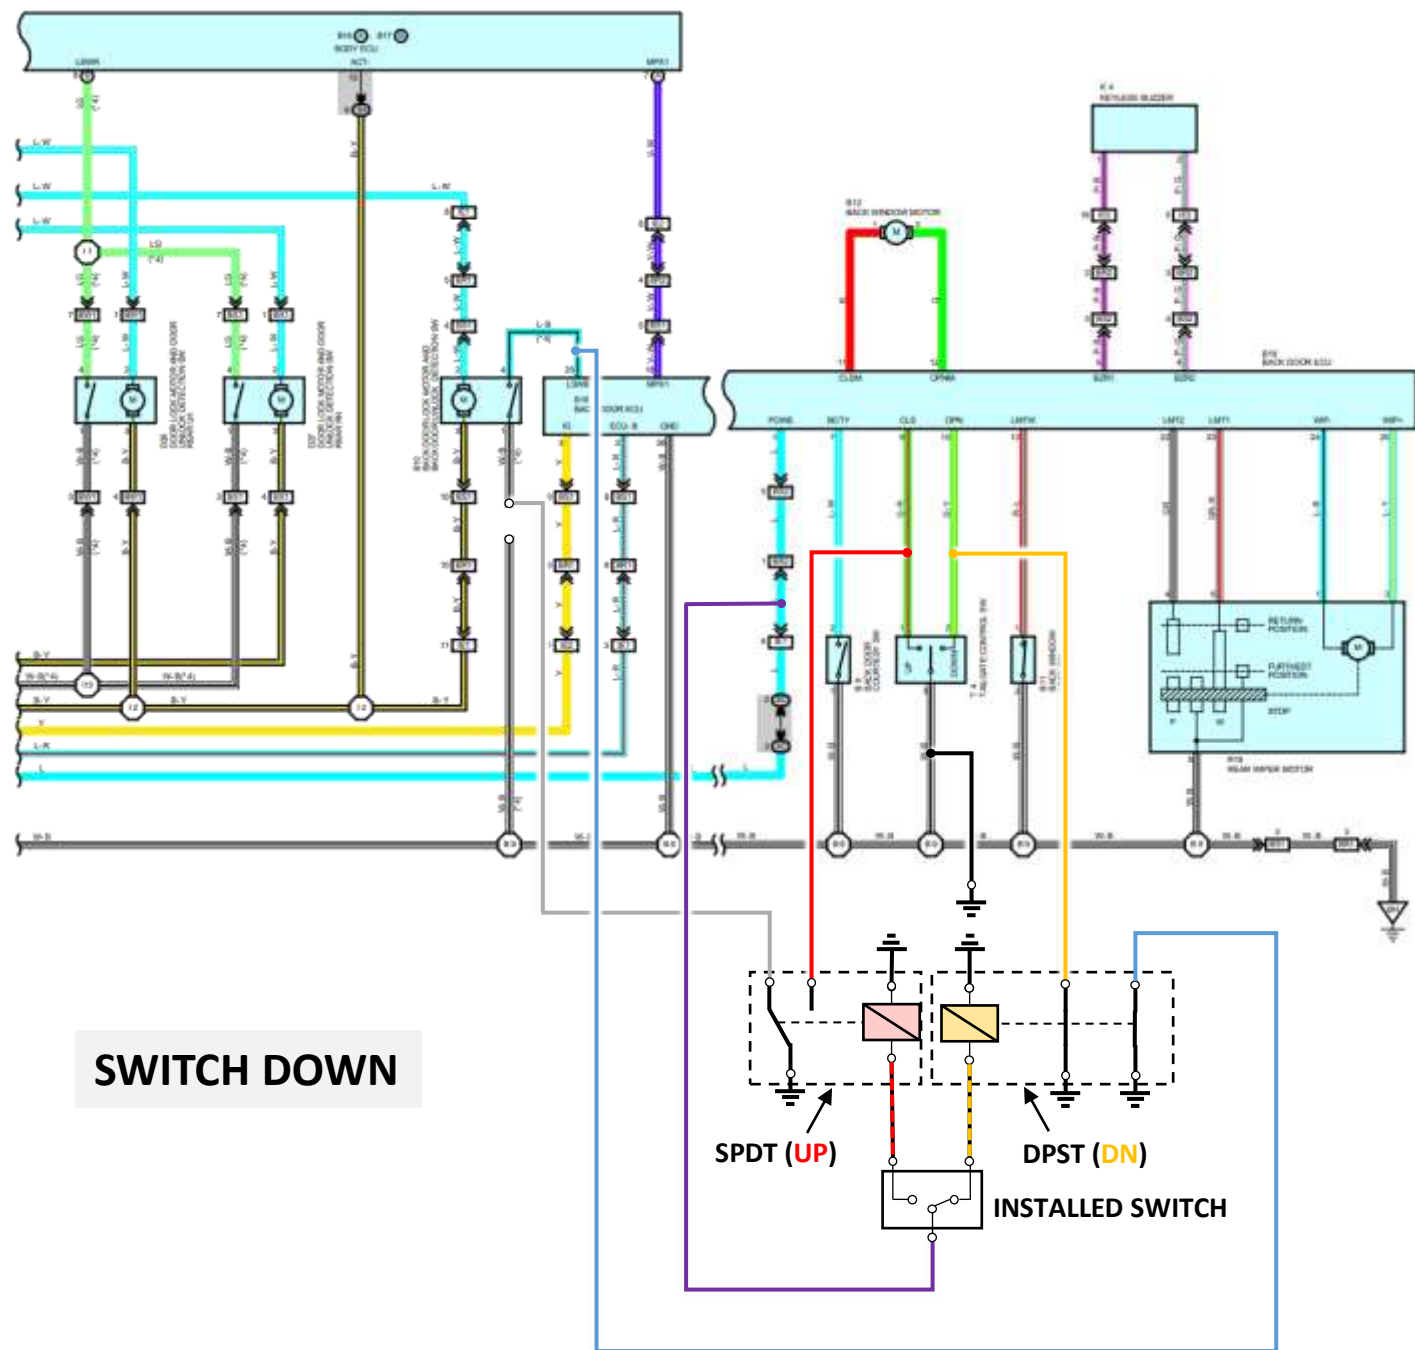

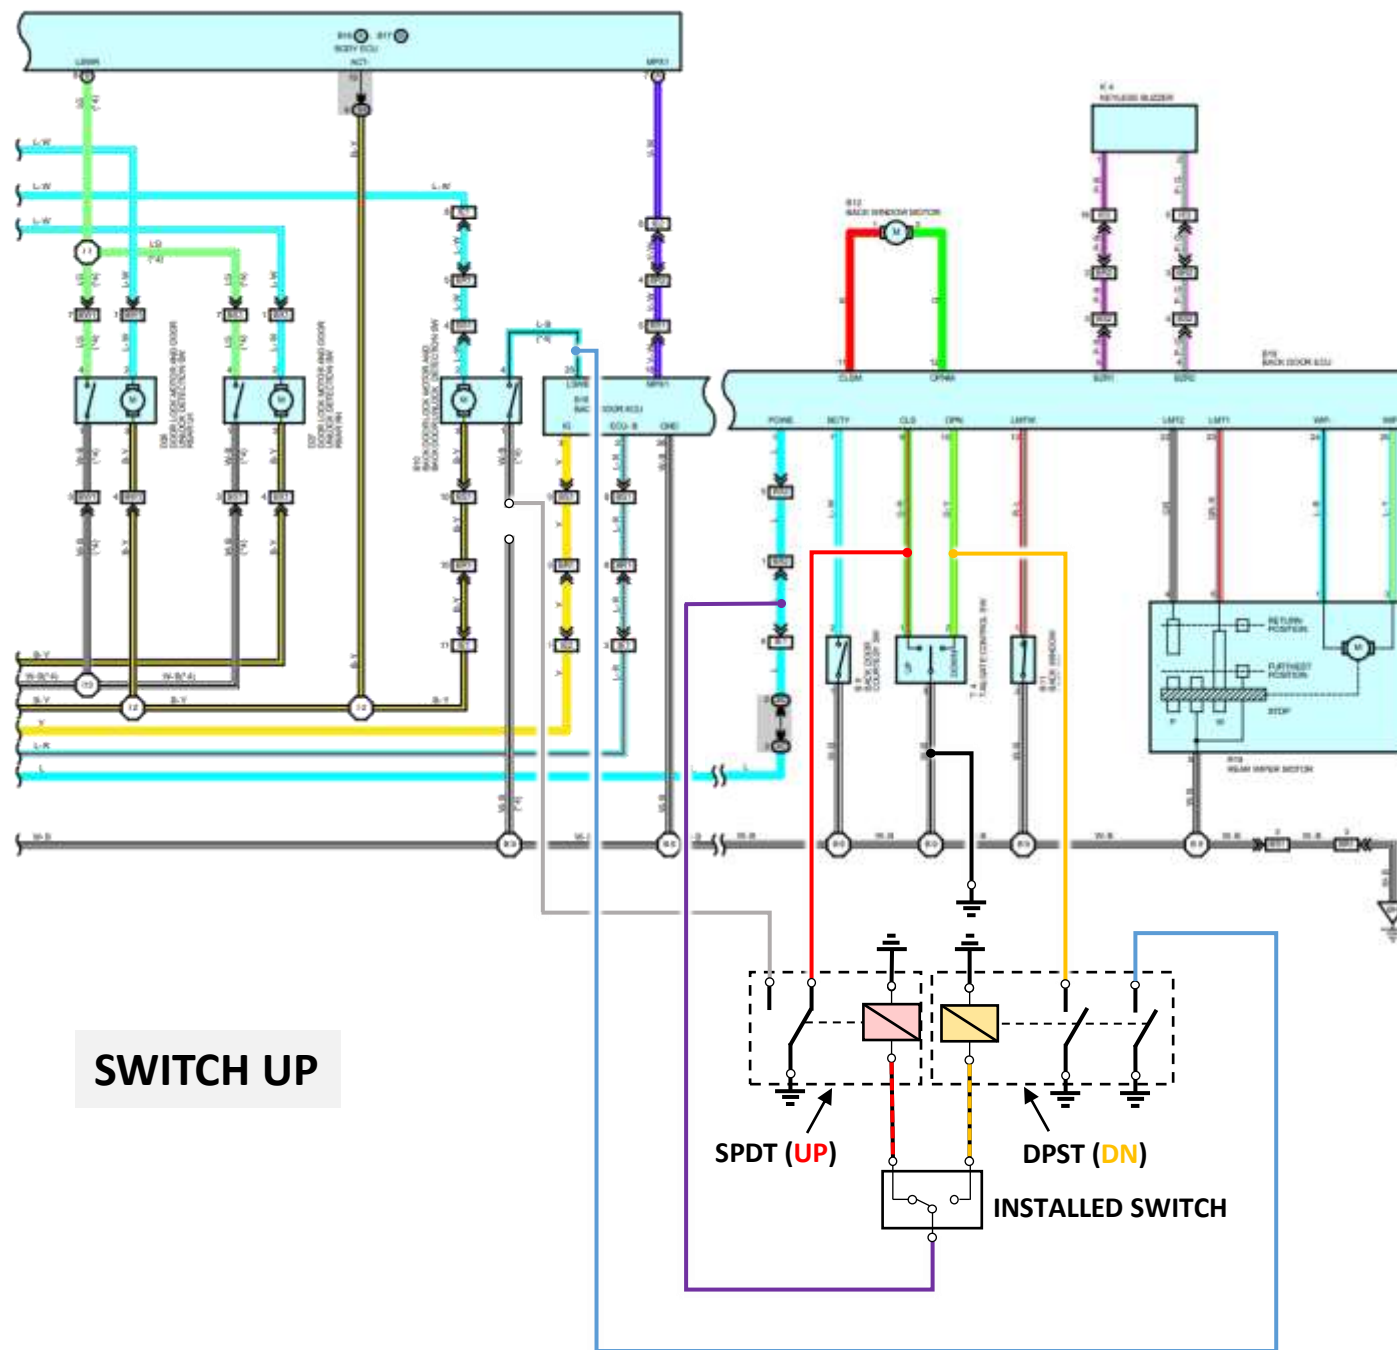


KEY CYLINDER

4

6


5

TO RELAYS

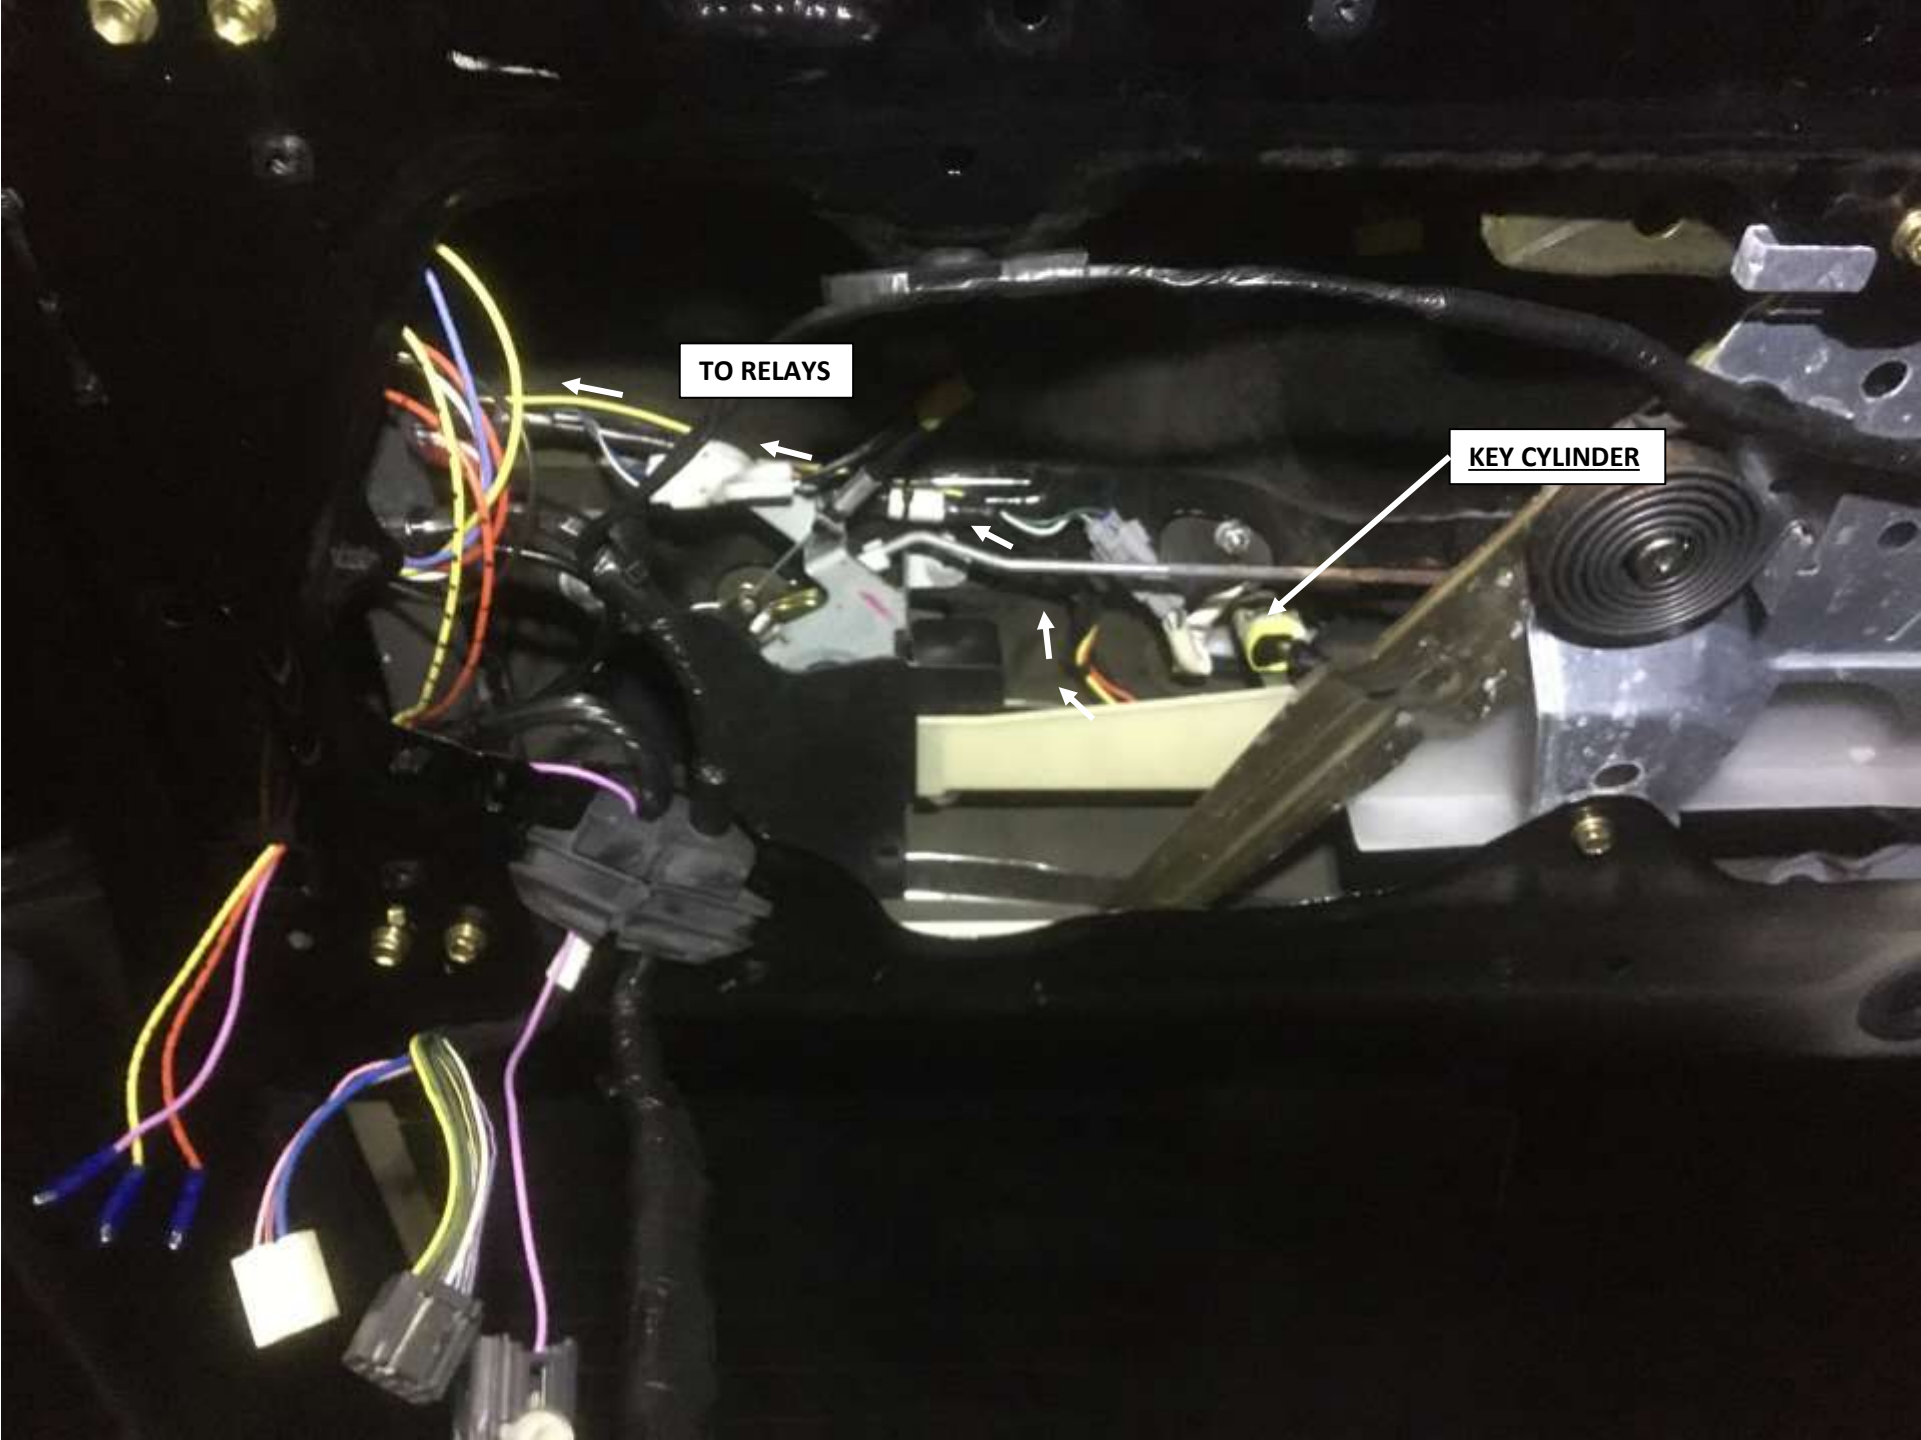

TO RELAYS


KEY CYLINDER

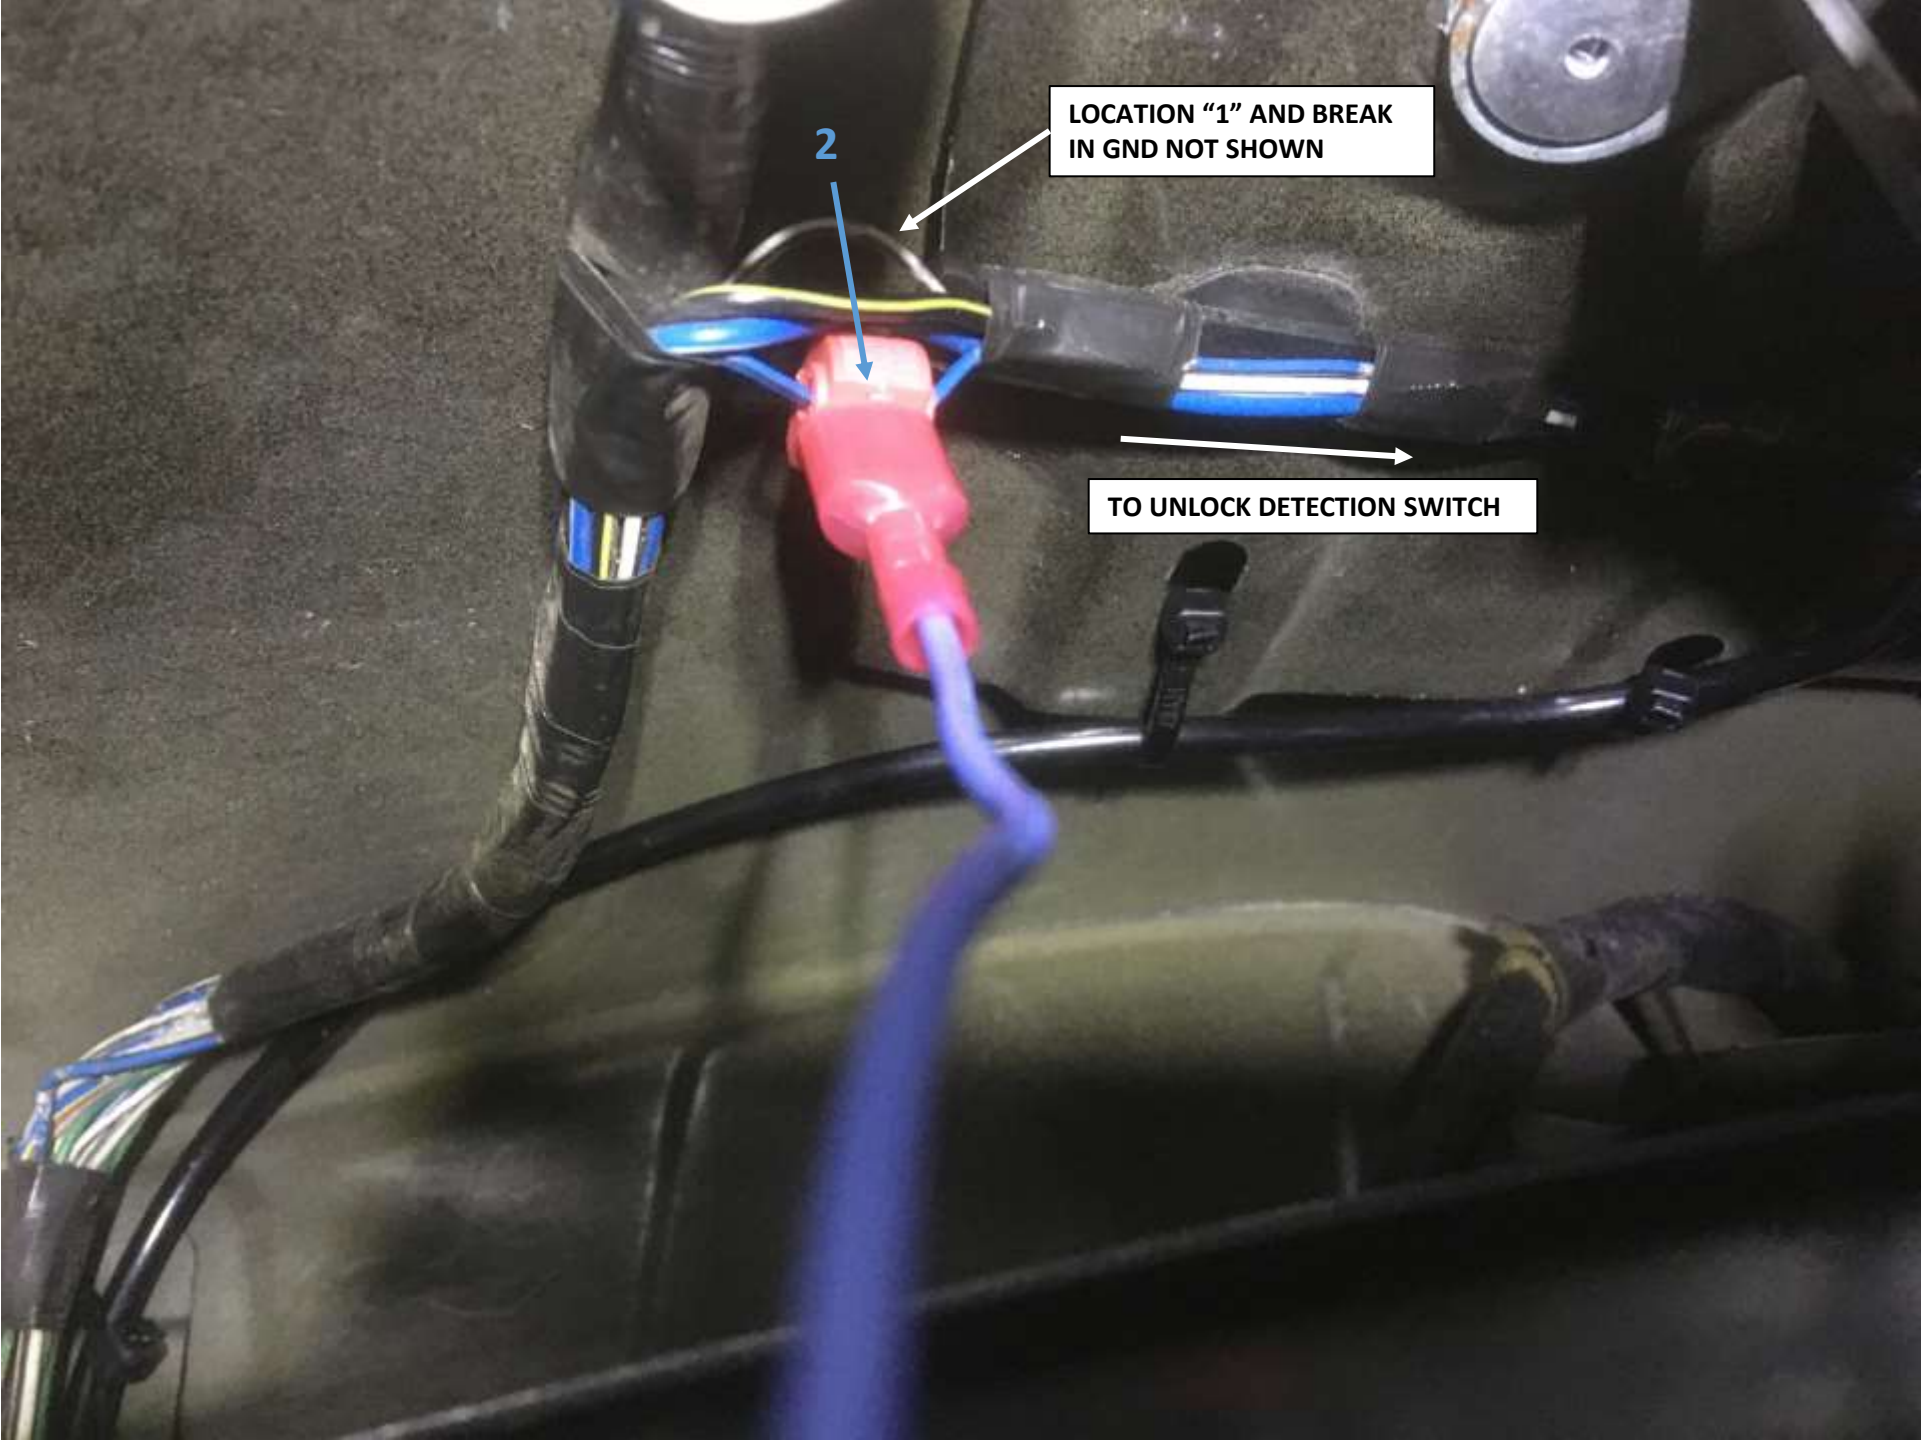

LOCATION "1" AND BREAK
IN GND NOT SHOWN

2

TO UNLOCK DETECTION SWITCH

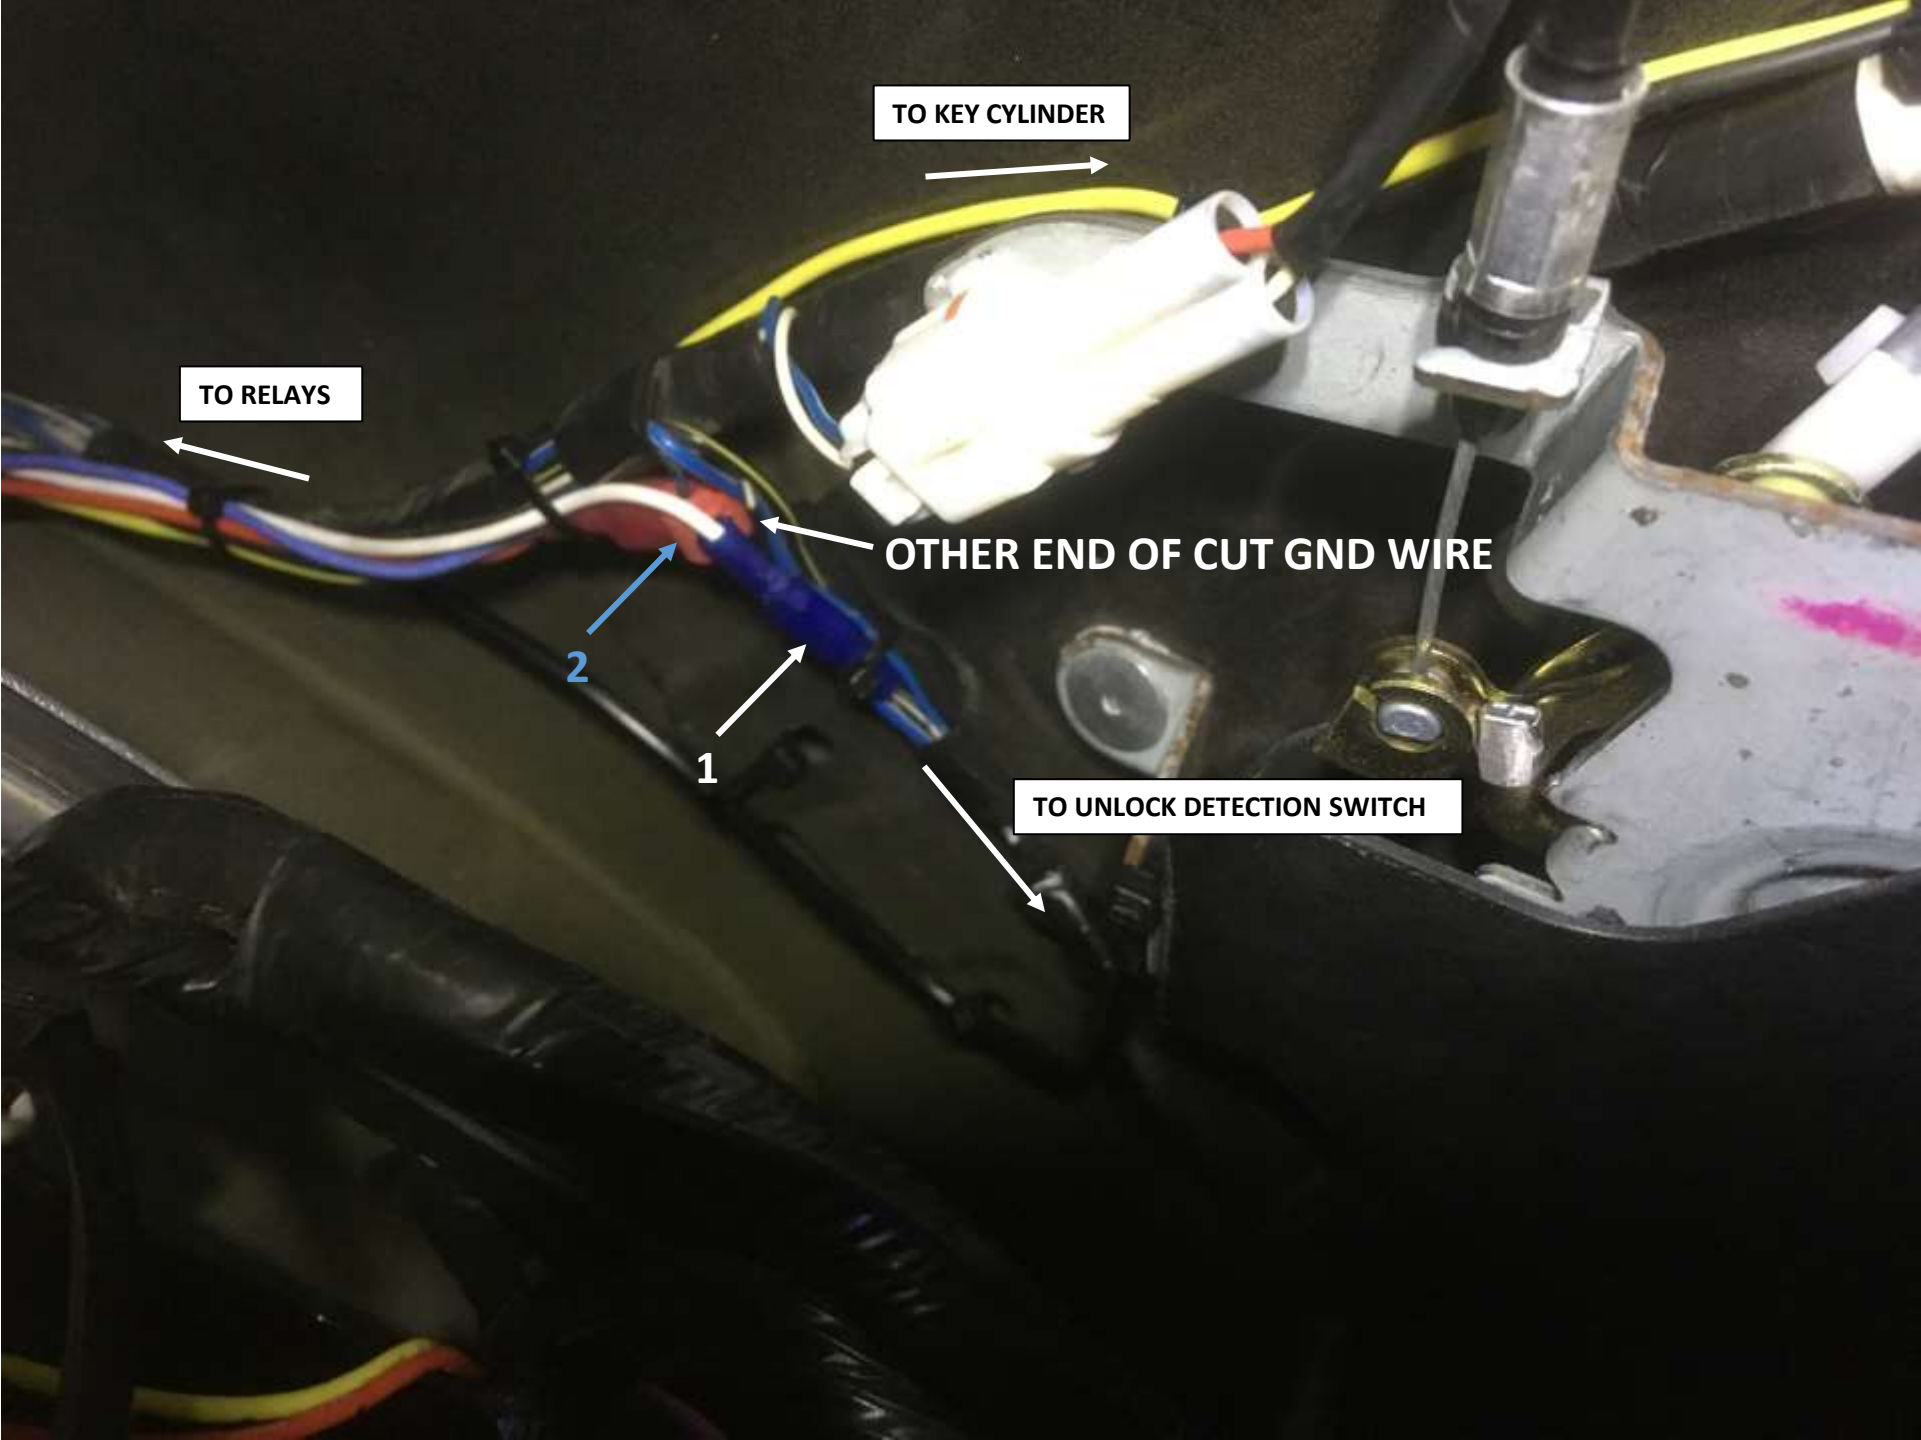

TO KEY CYLINDER


TO RELAYS

OTHER END OF CUT GND WIRE

TO UNLOCK DETECTION SWITCH

2

1

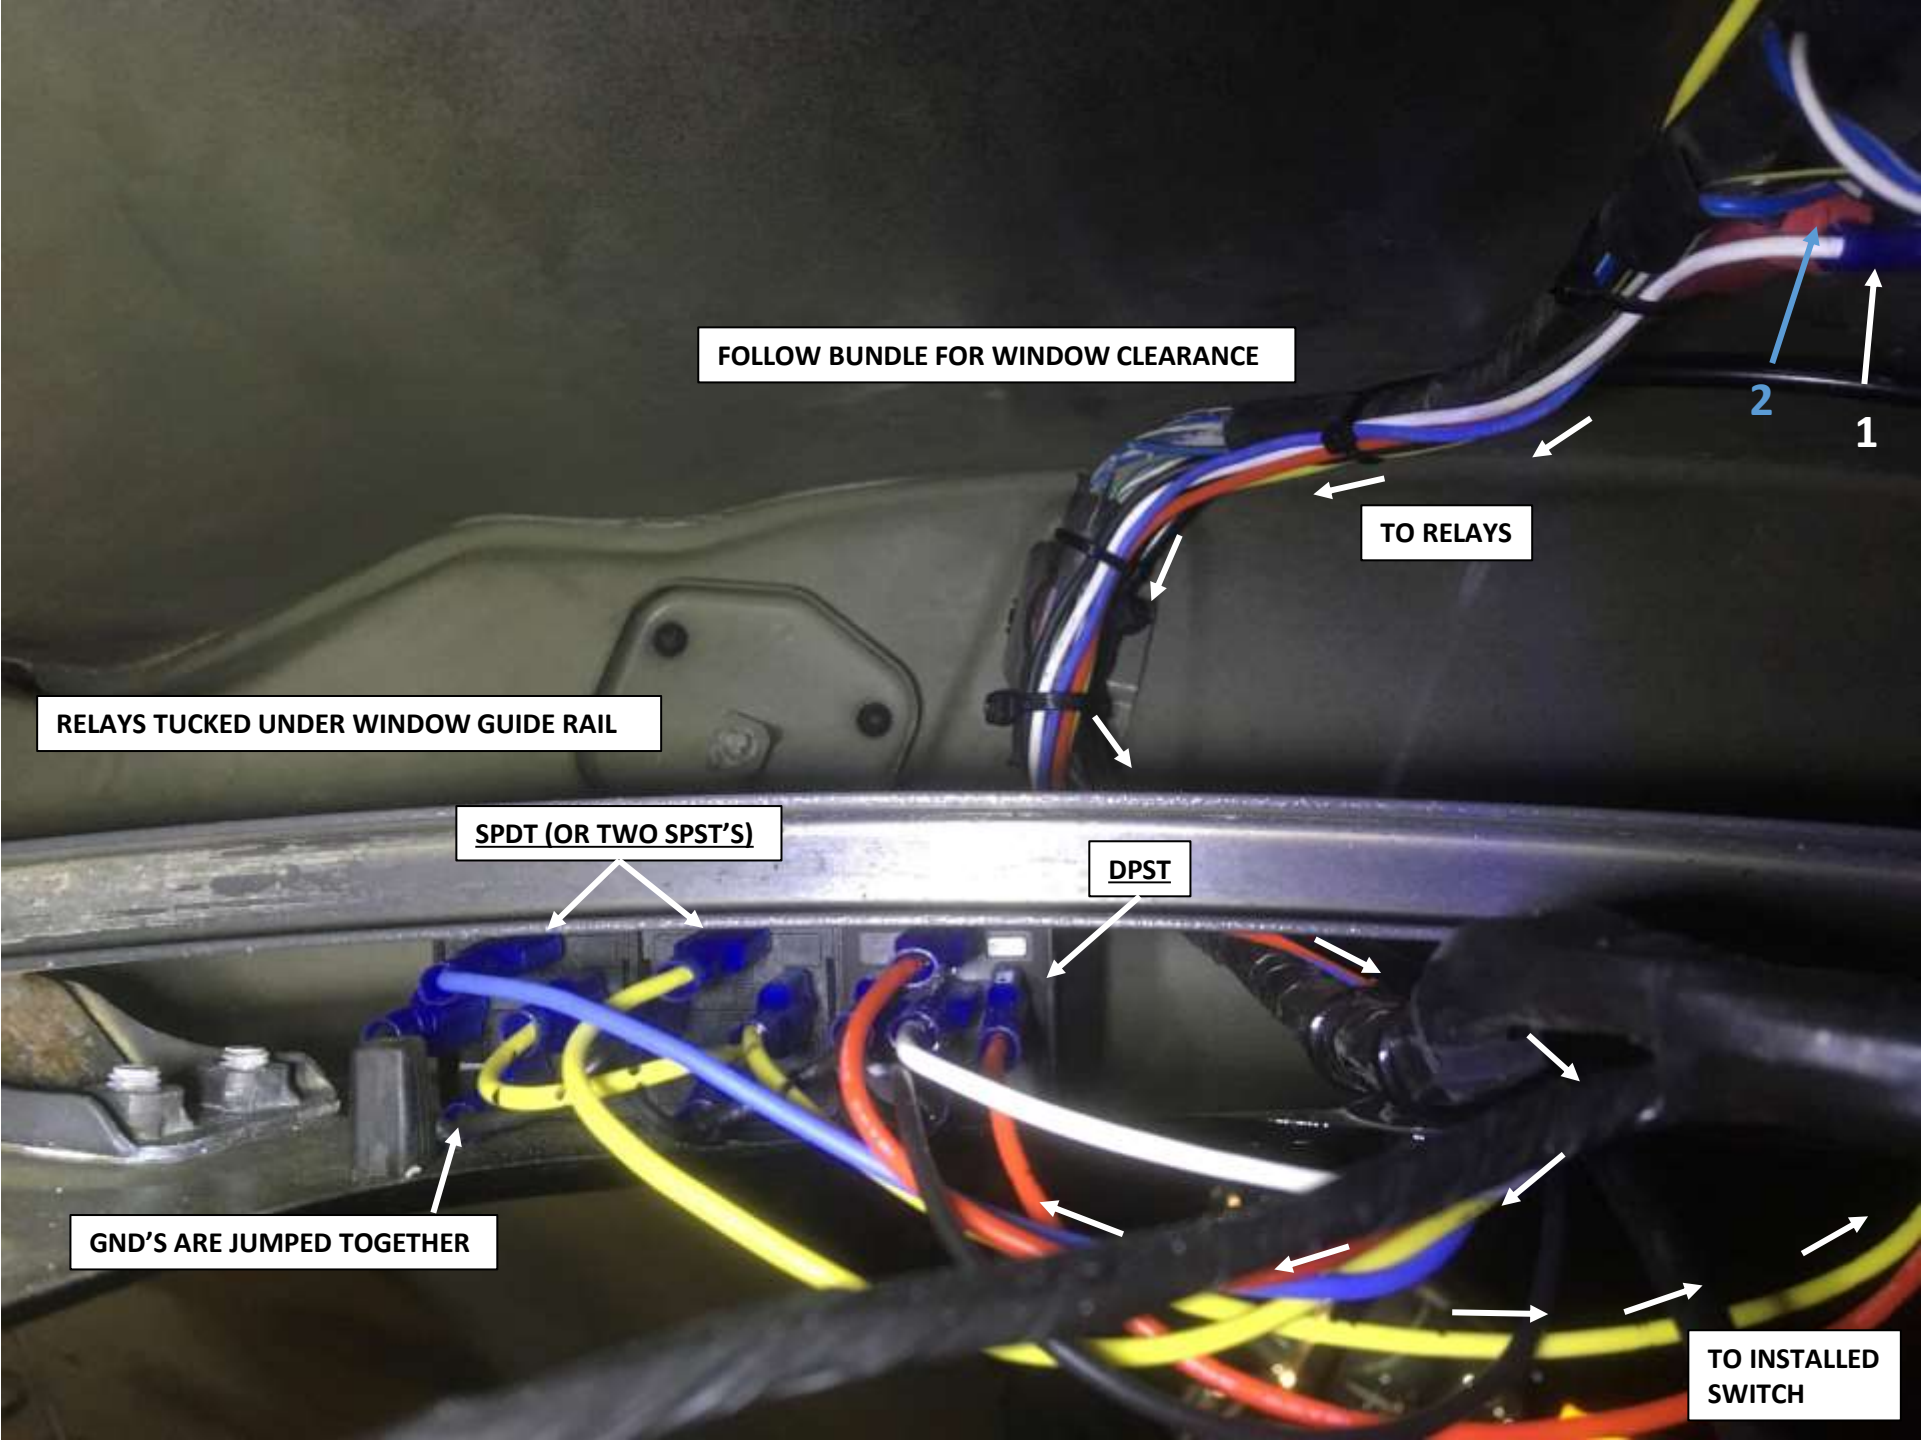

FOLLOW BUNDLE FOR WINDOW CLEARANCE

TO RELAYS


RELAYS TUCKED UNDER WINDOW GUIDE RAIL

SPDT (OR TWO SPST'S)

DPST

GND'S ARE JUMPED TOGETHER

TO INSTALLED SWITCH

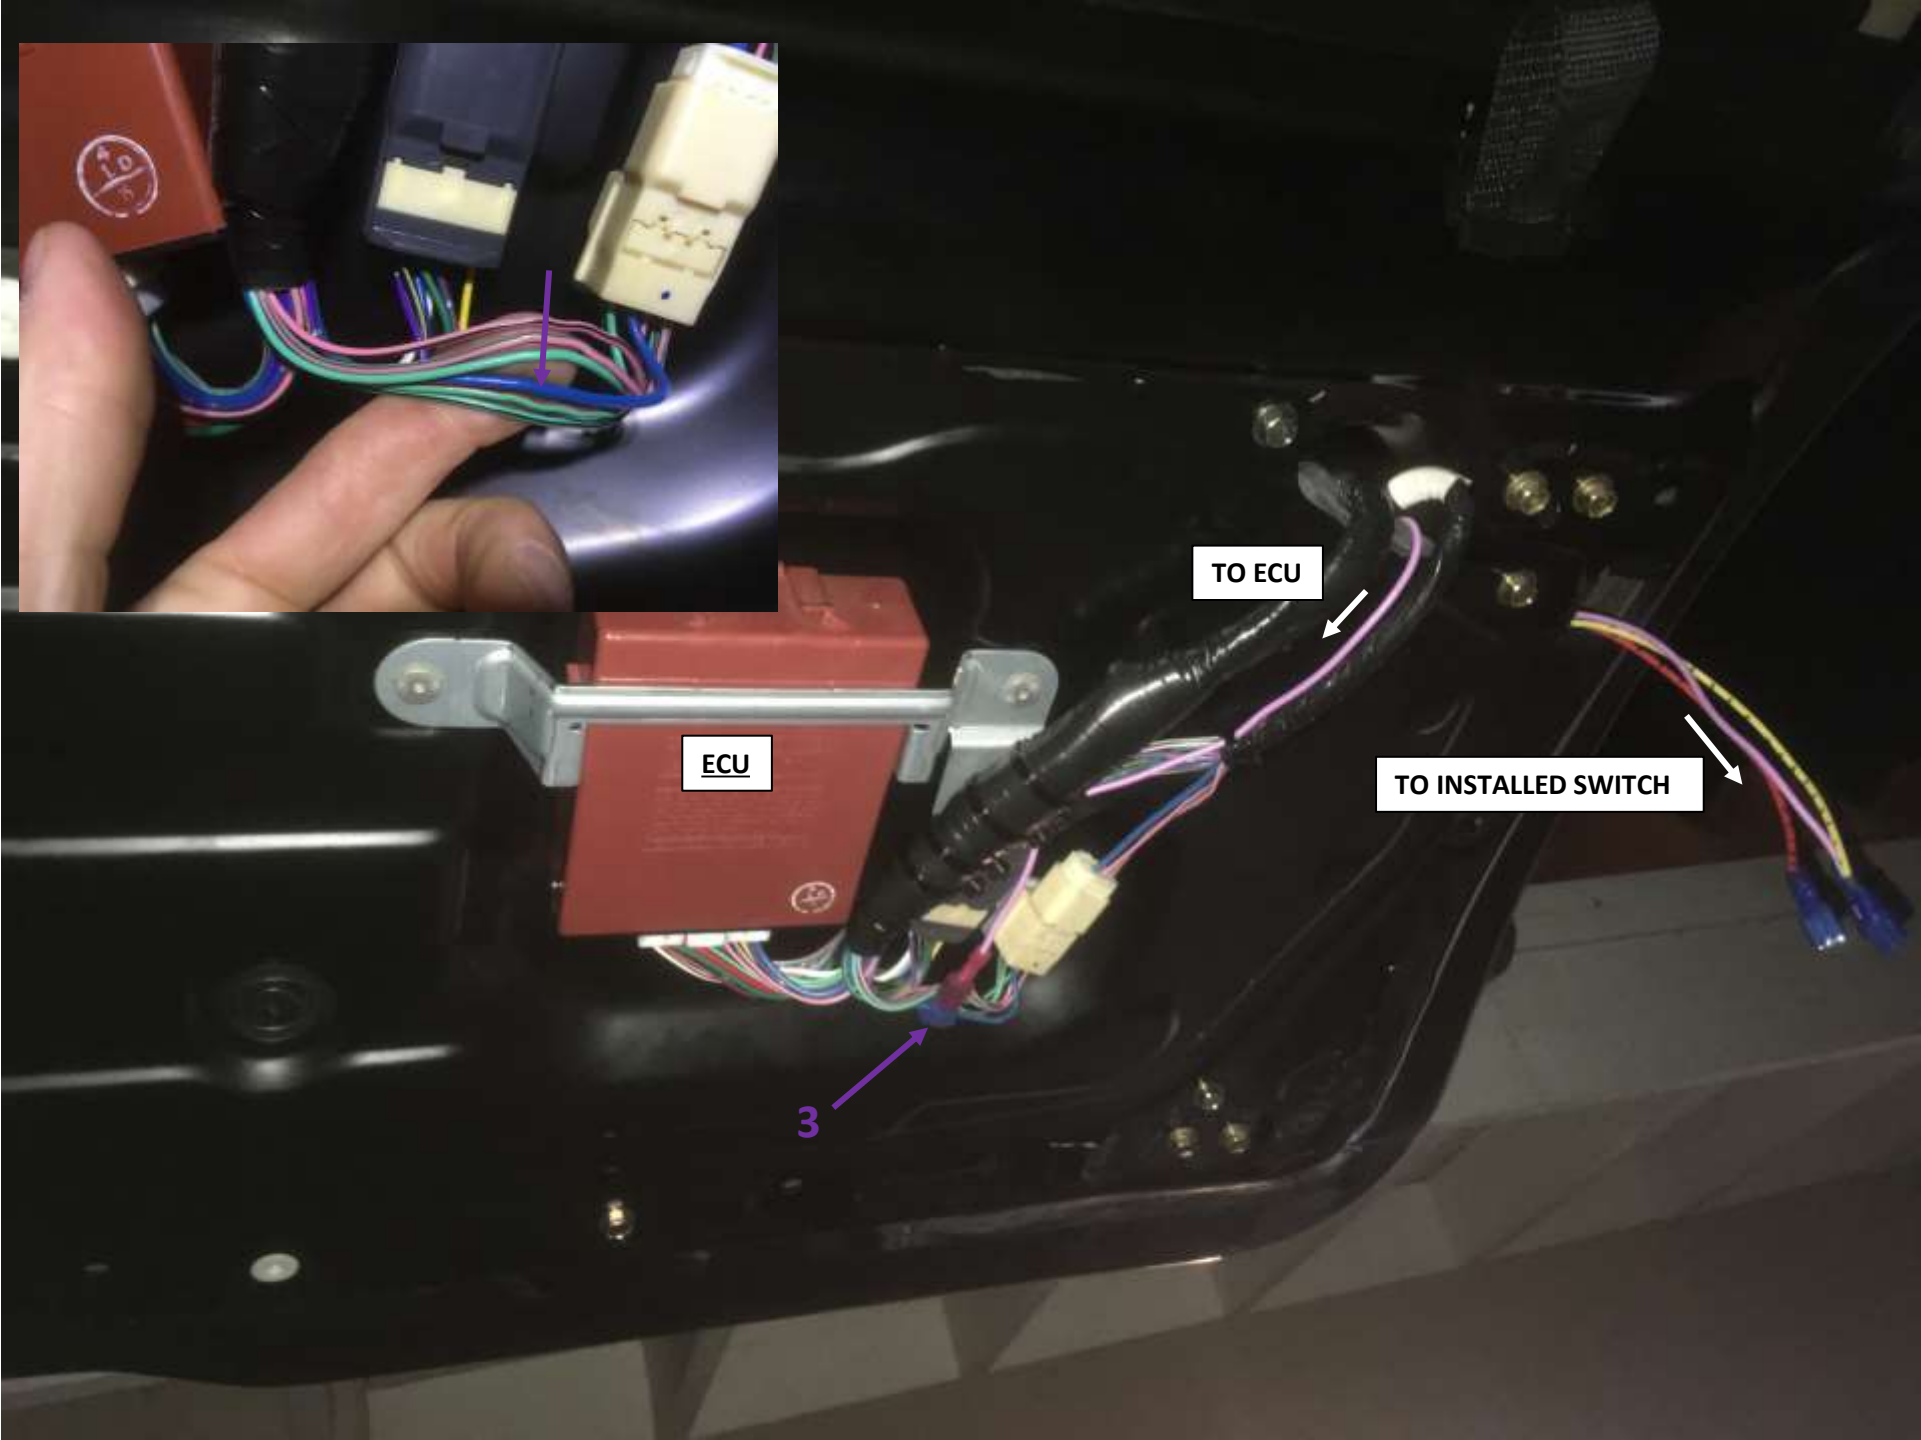



INSTALLED SWITCH



INSTALLED SWITCH