


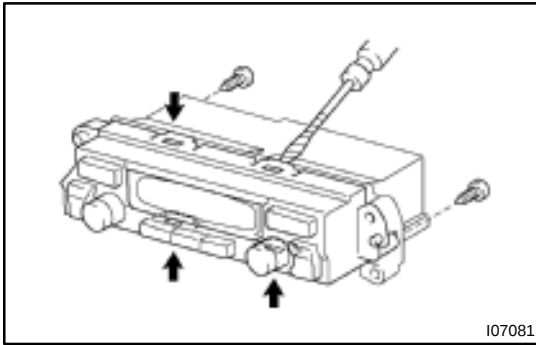

DISASSEMBLY


1. REMOVE A/C CONTROL PANEL

- (a) Remove the 2 screws.
- (b) Using a screwdriver, release the 4 claws.

HINT:


Tape the screwdriver tip before use.

- (c) Unlock the connector's lock and pull out the flat harness from the A/C control panel.

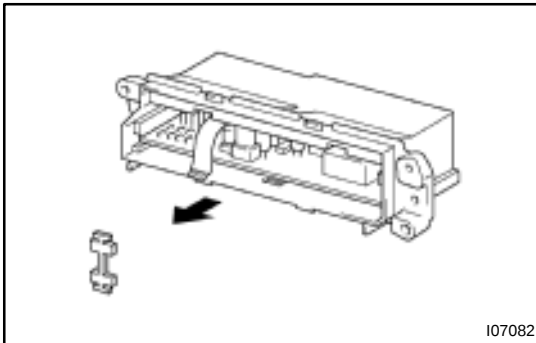

2. REMOVE A/C AMPLIFIER

- (a) Release the 4 claws and remove the holder.
- (b) Hold the connector of amplifier and pull out the amplifier.

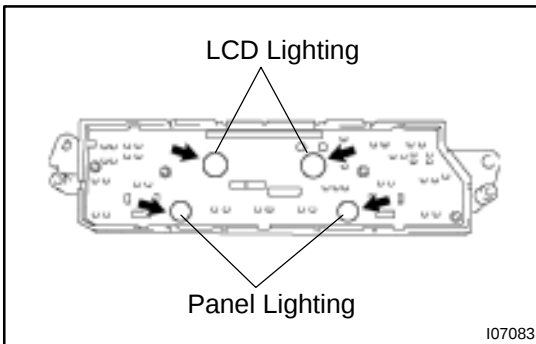

3. REMOVE BULB

Using a screwdriver, turn the bulb to the left and pull out the bulb.