


FRAME DIMENSIONS

(For USA & CANADA)

(Three-Dimensional Distance)

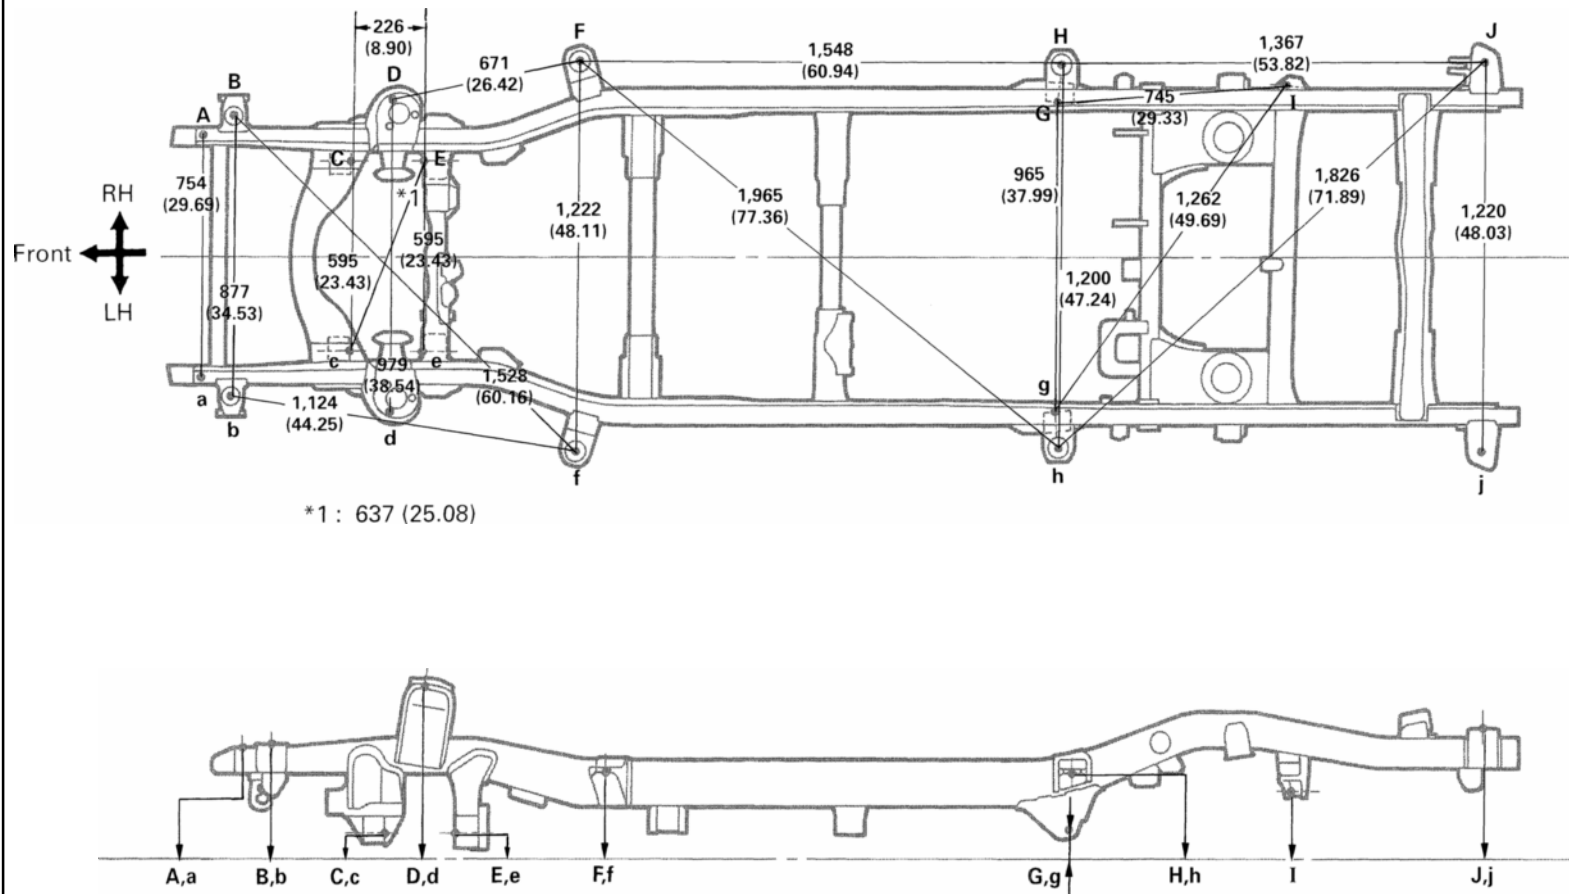


mm (in.)


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Winch installation hole	15 (0.59)	F, f	Body mounting hole	24 (0.94)
B, b	Body mounting hole	24 (0.94)	G, g	Suspension lower arm installation hole-inner	14.2 (0.559)
C, c	Suspension lower arm installation hole front-rear	38×20 (1.50×0.79)	H, h	Body mounting hole	24 (0.94)
D, d	Front spring support hole-outer	11.5 (0.453)	I	Lateral control rod installation hole-front	12.2 (0.480)
E, e	Suspension lower arm installation hole rear-front	38×20 (1.50×0.79)	J, j	Body mounting hole	60 (2.36)

(Two-Dimensional Distance)

(For USA & CANADA)

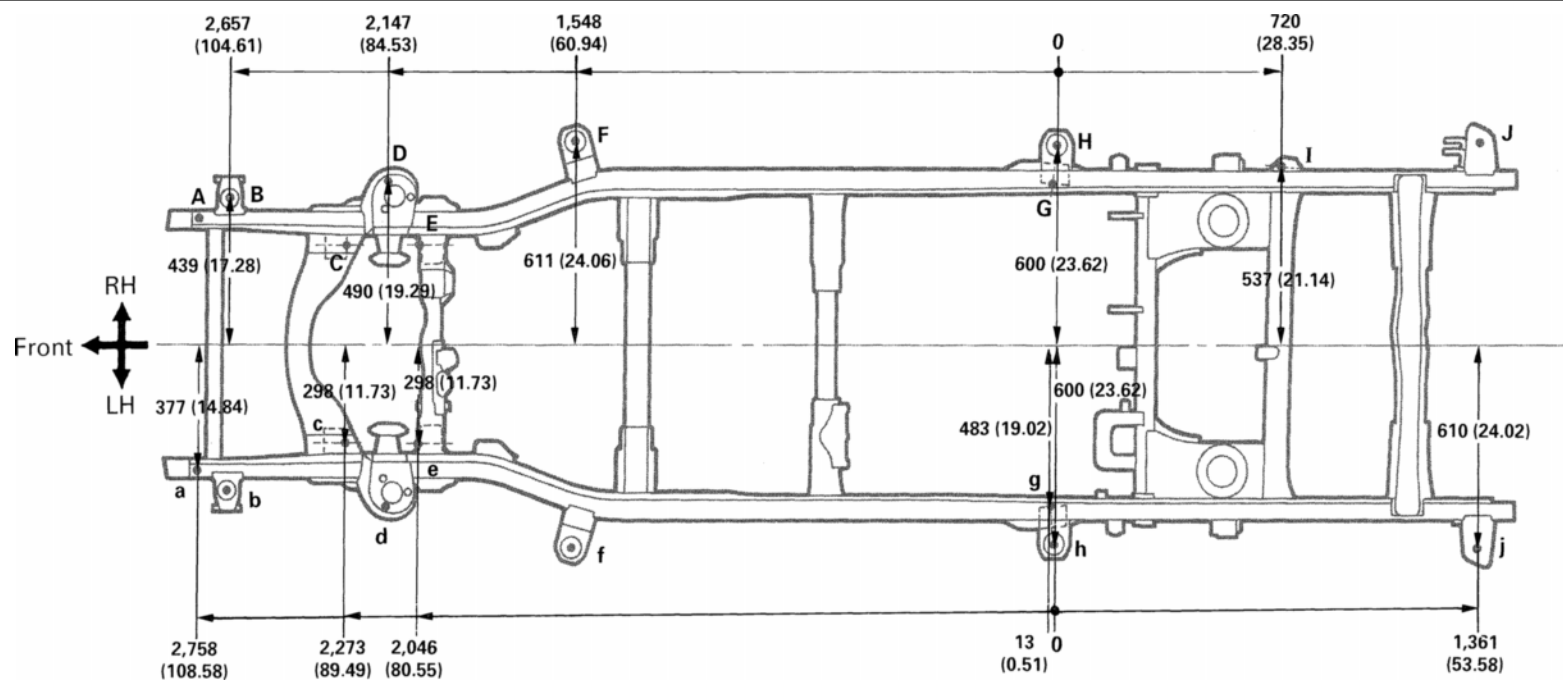

Wheel base	2,675 (105.31)
------------	----------------

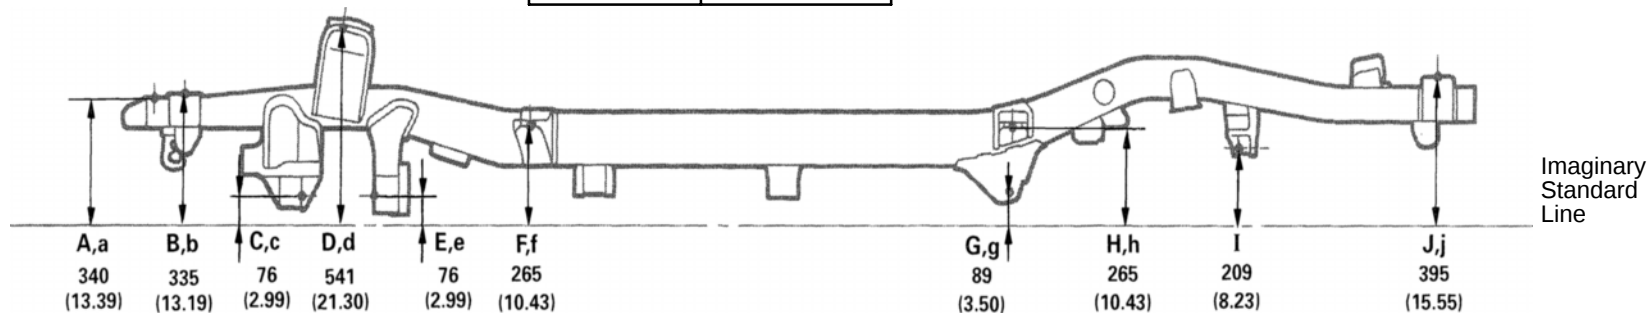

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Winch installation hole	15 (0.59)	F, f	Body mounting hole	24 (0.94)
B, b	Body mounting hole	24 (0.94)	G, g	Suspension lower-arm installation hole-inner	14.2 (0.559)
C, c	Suspension lower arm installation hole front-rear	38×20 (1.50×0.79)	H, h	Body mounting hole	24 (0.94)
D, d	Front spring support hole-outer	11.5 (0.453)	I	Lateral control rod installation hole-front	12.2 (0.480)
E, e	Suspension lower arm installation hole rear-front	38×20 (1.50×0.79)	J, j	Body mounting hole	60 (2.36)