



Technical Service BULLETIN

August 27, 1999

Title:

PROPELLER SHAFT JOINT GREASE

Models:

'96-'99 4Runner 4WD, '95-'99 Tacoma 4WD,
'98-'99 PreRunner, & '00 Tundra 4WD

DL001-99

DRIVELINE & DIFFERENTIAL

Introduction This Service Bulletin provides the location of the grease fittings for the propeller shaft joints as well as the type of grease to use with each fitting location. See the Scheduled Maintenance Guide of each vehicle for recommended lubrication intervals.

Applicable Vehicles

- 1996-1999 4Runner 4WD, 1995-1999 Tacoma 4WD, 1998-1999 PreRunner, & 2000 Tundra 4WD



Warranty Information

OP CODE	DESCRIPTION	TIME	OPN	T1	T2
-	Not Applicable to Warranty	-	-	-	-

Procedure for 4Runner

Use a grease gun to apply multi-purpose grease to the No. 1, 2, 3, 7 and 8 grease fittings. Apply molybdenum disulfide lithium base chassis grease, NLGI No. 2, to the No. 4, 5 and 6 grease fittings (double cardan joint).



Grease Fittings for 4WD Front Propeller Shaft

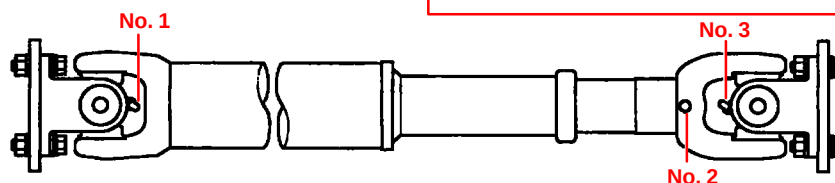

NOTE:

The figure at the left shows the locations of the grease fittings as seen from the rear of the vehicle.

Grease Fittings for 4WD Rear Propeller Shaft

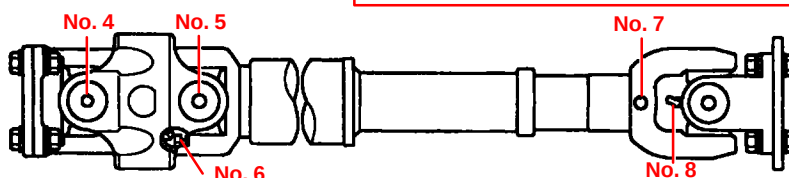




NOTE:

The figure at the left shows the locations of the grease fittings as seen from the rear of the vehicle.



**Procedure
for Tacoma &
PreRunner**

Use a grease gun to apply multi-purpose grease to the No. 1, 2, 3, 7 8, 9, 13 and 14 grease fittings. Apply molybdenum disulfide lithium base chassis grease, NLGI No. 2, to the No. 4, 5, 6, 10, 11 and 12 grease fittings (double cardan joint).

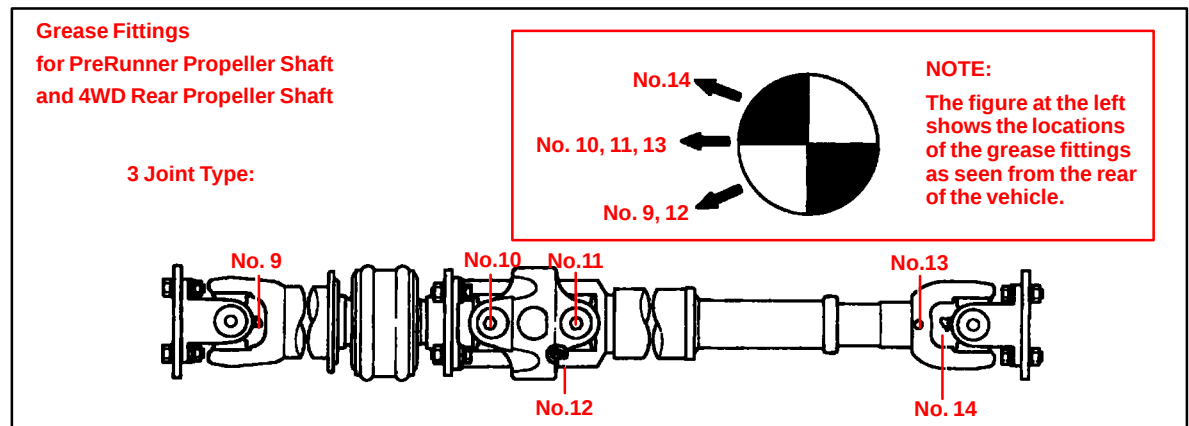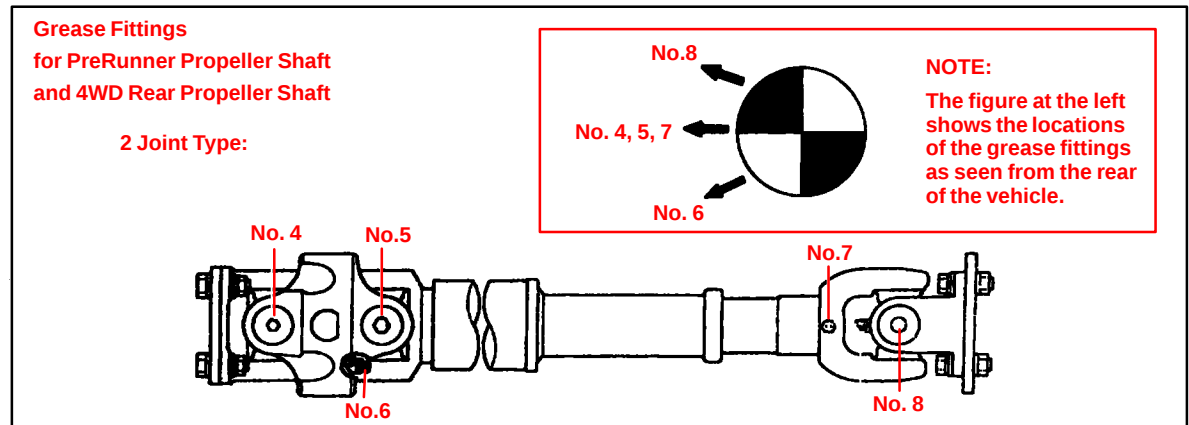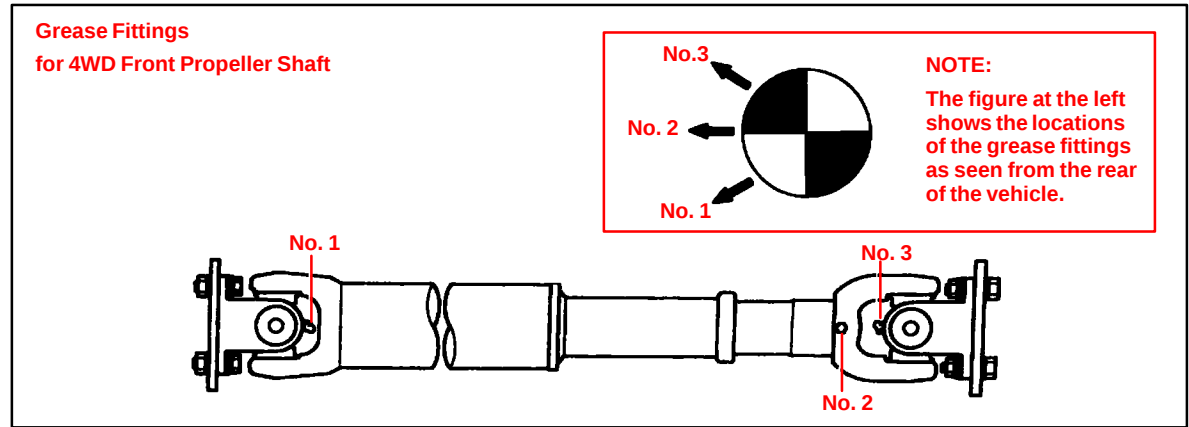

**Procedure
for Tundra**

Use a grease gun to apply multi-purpose grease to the No. 1, 2, 3, 7 and the slip yoke grease fittings. Apply molybdenum disulfide lithium base chassis grease, NLGI No. 2, to the No. 4, 5, and 6 grease fittings (double cardan joint).

