

See step [4](#)

13. INSTALL REAR QUARTER PANEL MUDGUARD RH

HINT:

Use the same procedure as for the LH side.


14. INSTALL JACK BOX HOLE COVER

- a. Attach the 2 guides and 2 claws to install the jack box hole cover.


REAR SPOILER

COMPONENTS [08/2015 -]

ILLUSTRATION

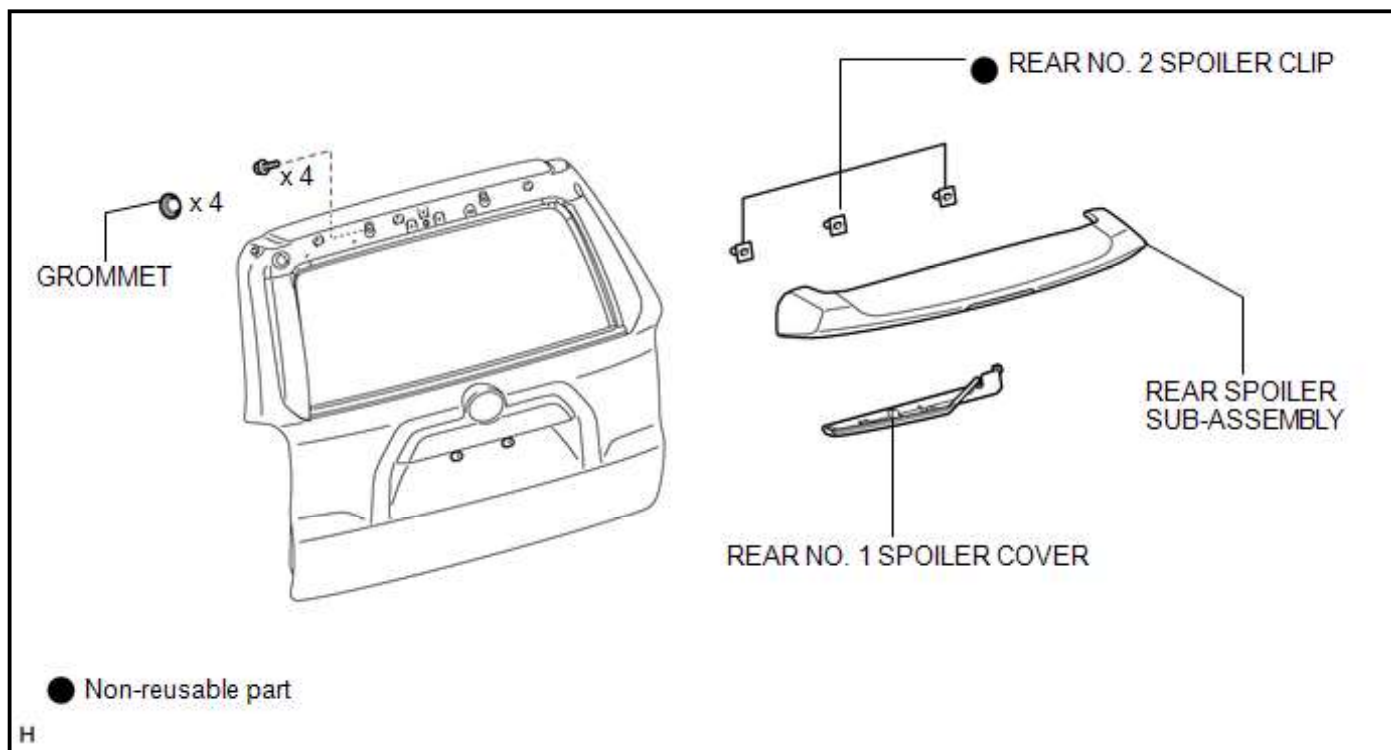


ILLUSTRATION

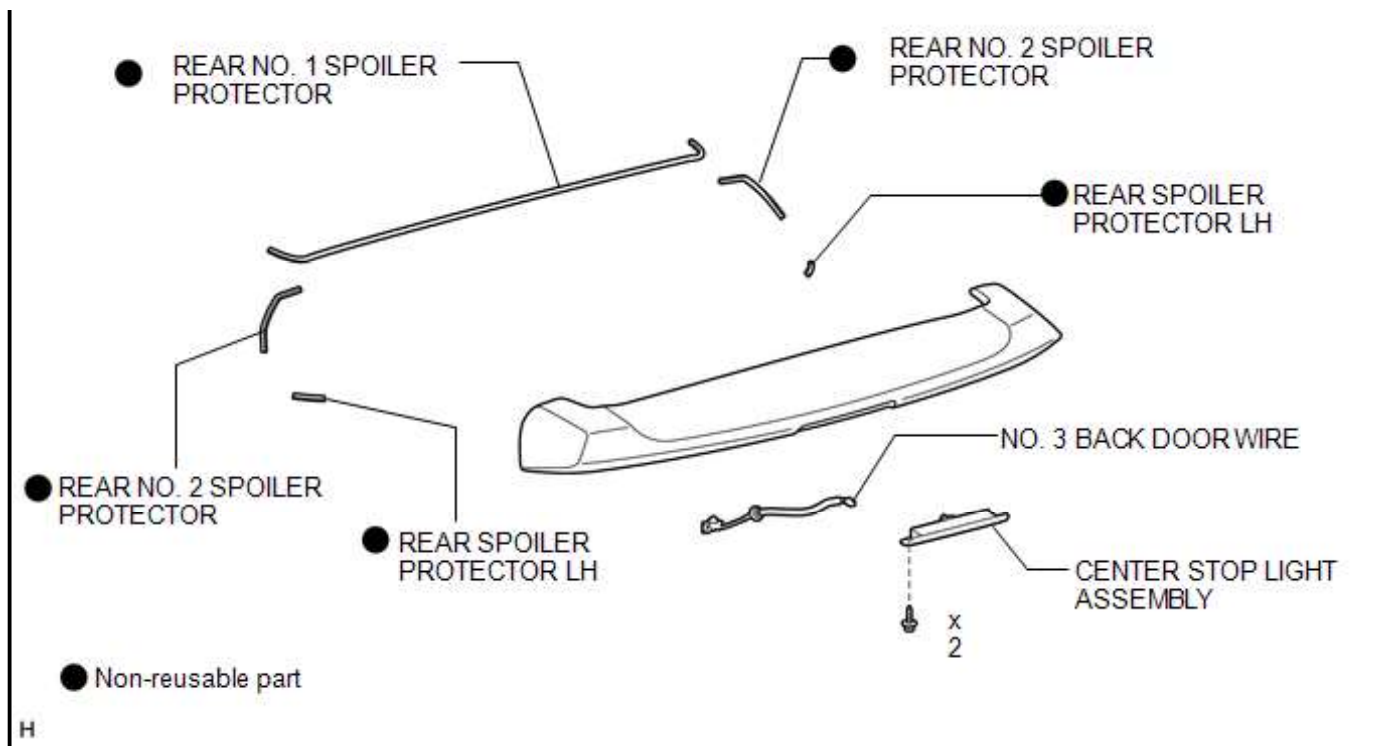

REMOVAL [08/2015 -]

PROCEDURE


1. REMOVE REAR NO. 1 SPOILER COVER

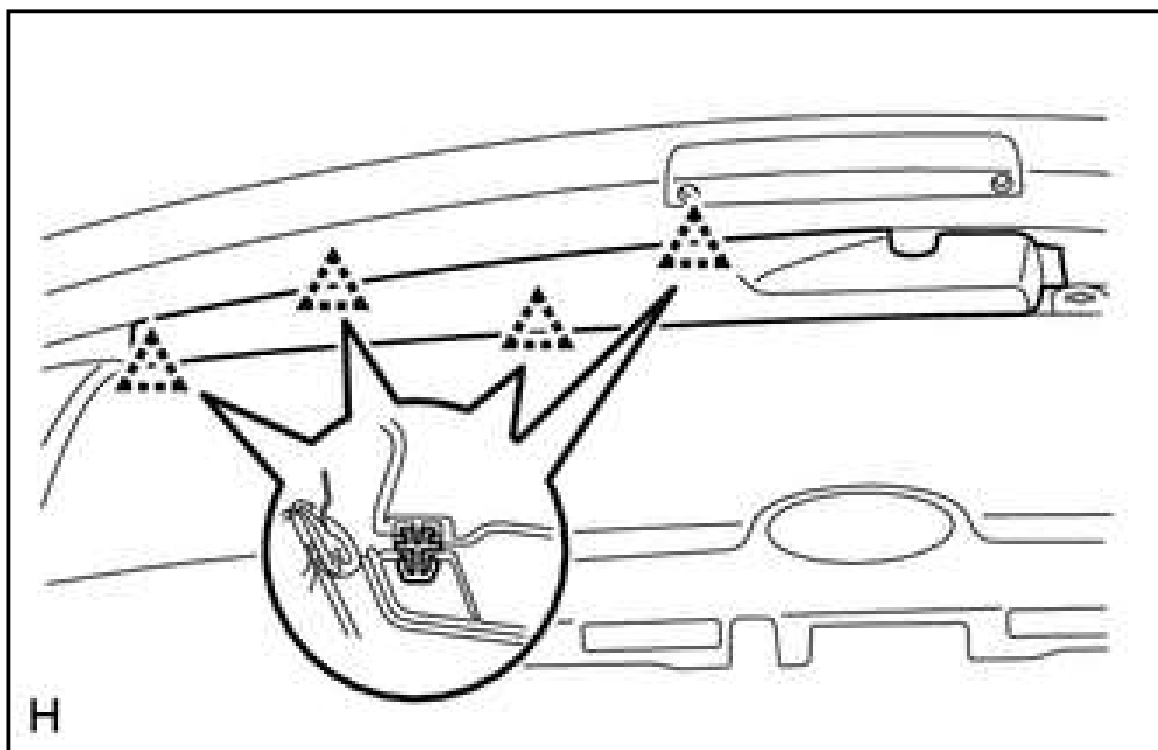

- a. Detach the 4 clips and remove the rear No. 1 spoiler cover.


2. REMOVE REAR SPOILER SUB-ASSEMBLY

- a.

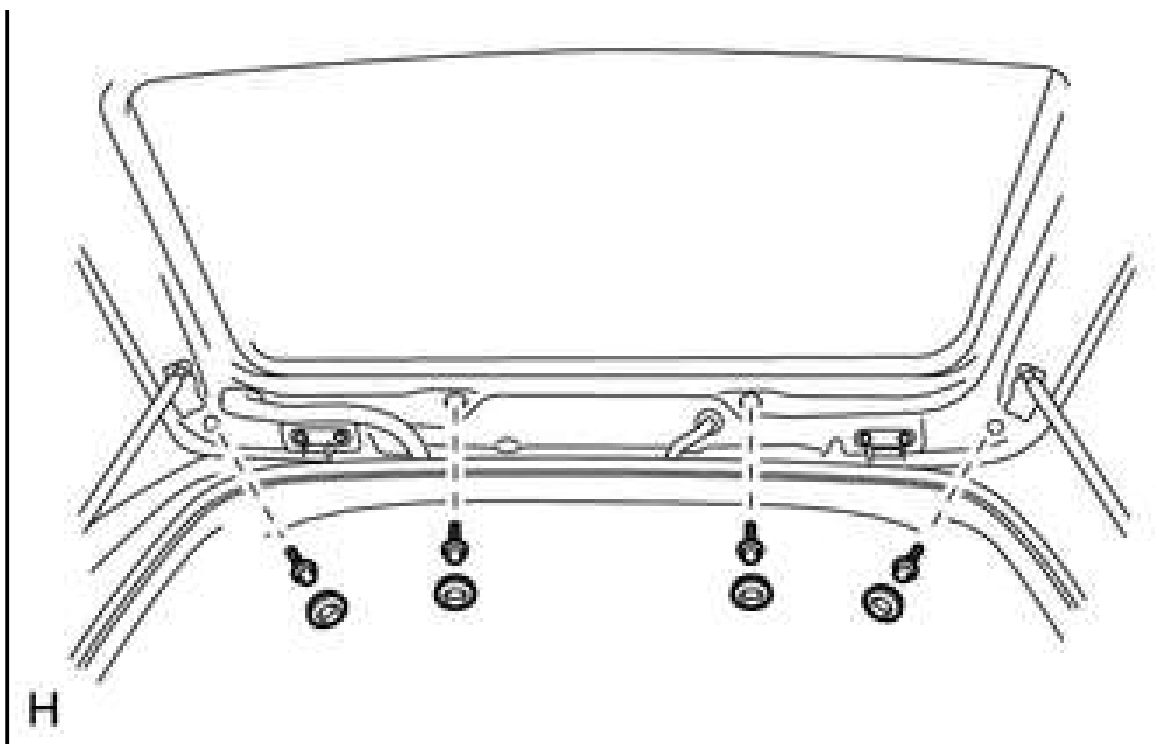

Remove the 4 grommets and 4 bolts.

b.

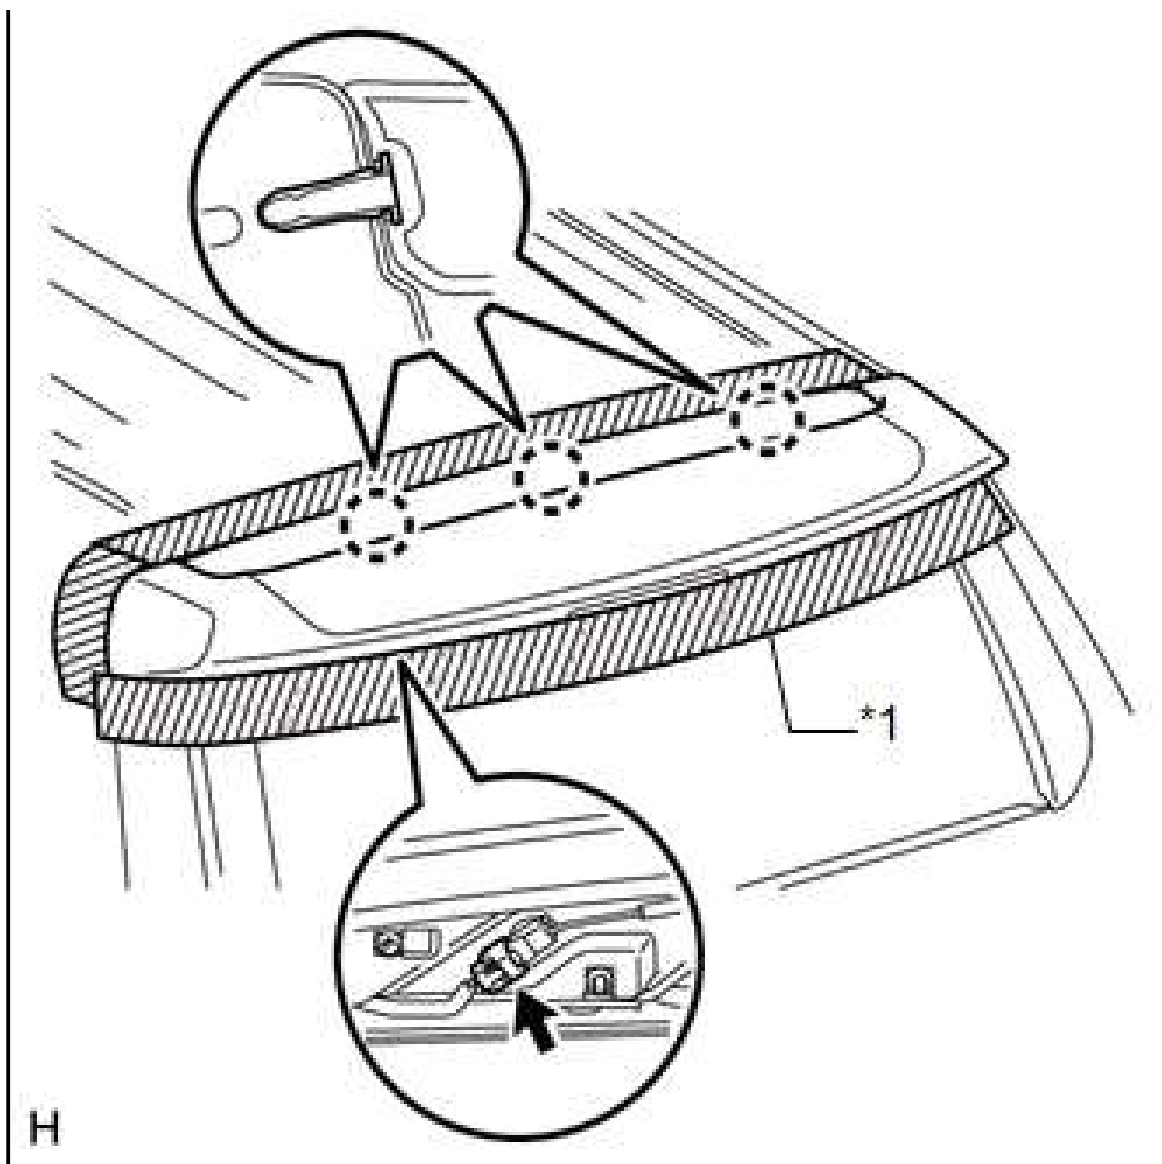

Put protective tape around the rear spoiler.

*1	Protective Tape
----	-----------------


c. Disconnect the connector.

d. Detach the 3 claws and remove the rear spoiler.

3. REMOVE REAR NO. 2 SPOILER CLIP

HINT:

Use the same procedure to remove the rear No. 2 spoiler clip on the other side.

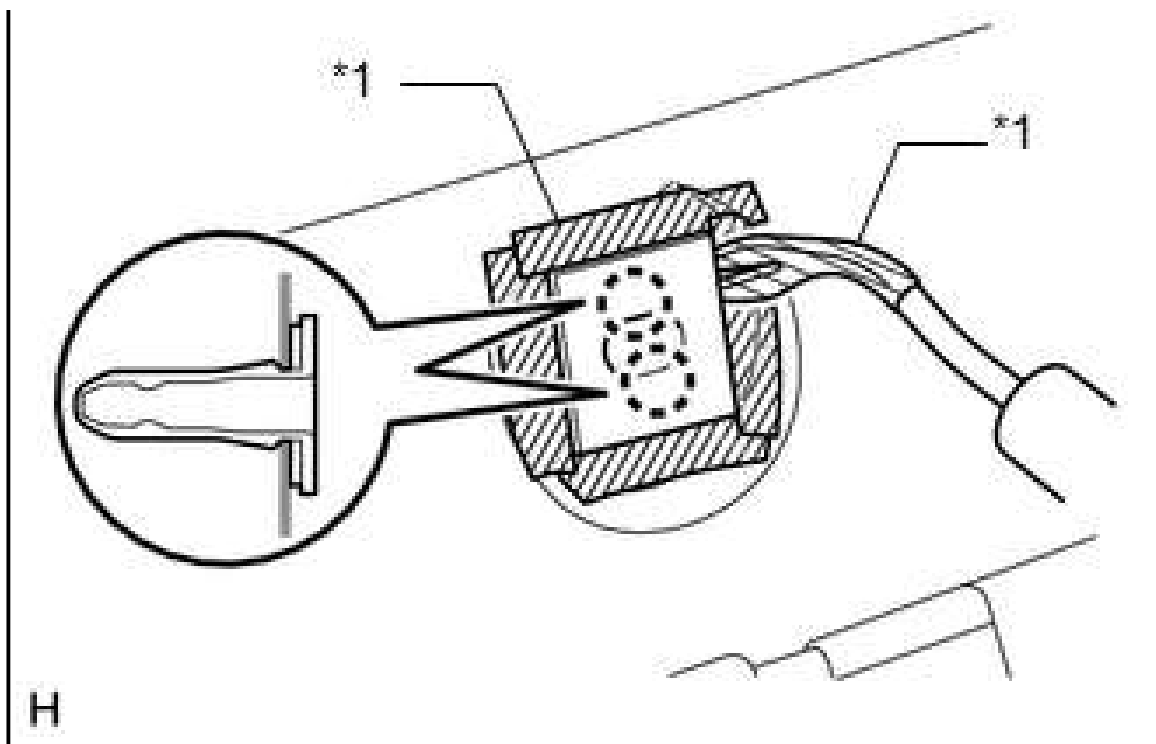


- a. Put protective tape around the No. 2 rear spoiler clip.
- b. Detach the 2 claws and No. 2 rear spoiler clip.

*1	Protective Tape
----	-----------------

DISASSEMBLY [08/2015 -]

PROCEDURE

1. REMOVE REAR NO. 1 SPOILER PROTECTOR

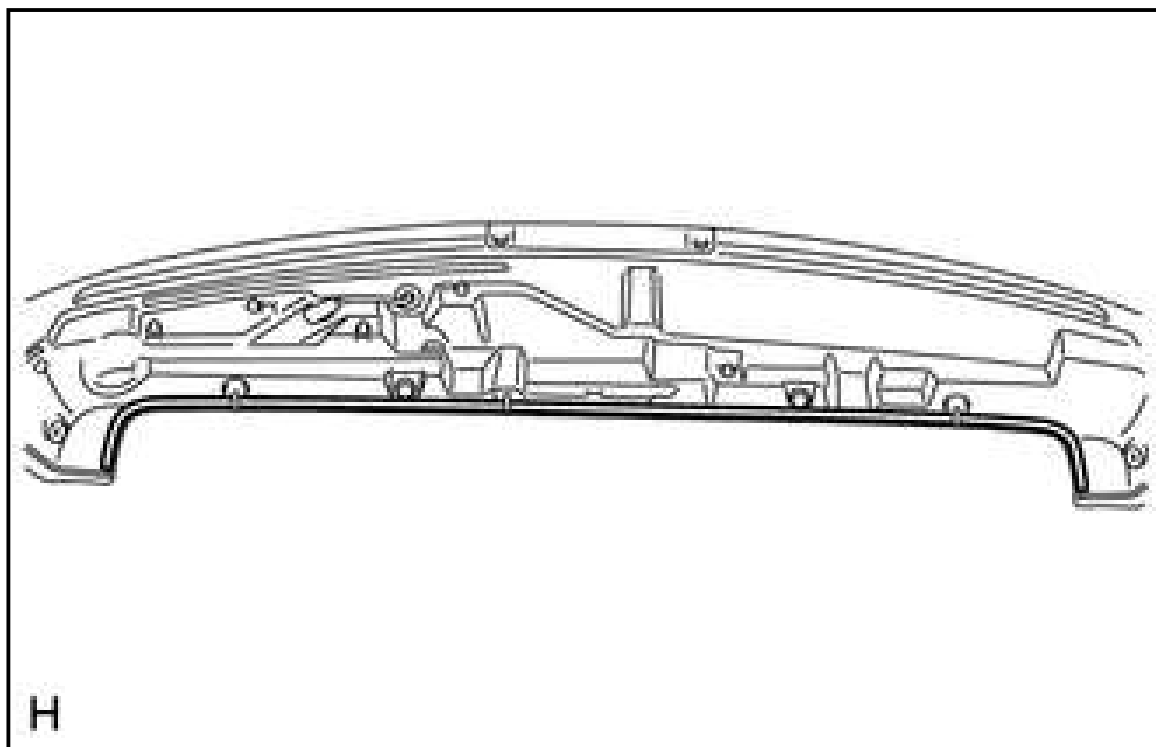


- a. Remove the rear No. 1 spoiler protector.

2. REMOVE REAR NO. 2 SPOILER PROTECTOR

HINT:

Use the same procedure to remove the rear No. 2 spoiler protector on the other side.

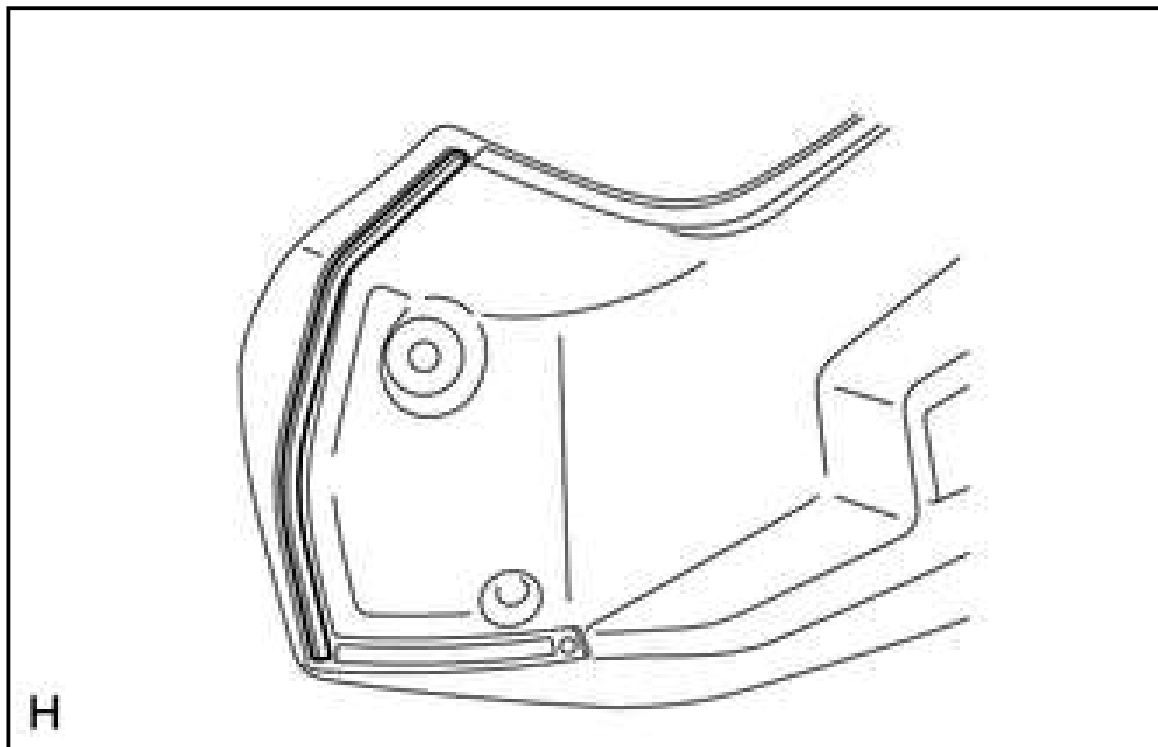


- a. Remove the rear No. 2 spoiler protector.

3. REMOVE REAR SPOILER PROTECTOR LH

HINT:

Use the same procedure to remove the rear spoiler protector on the other side.

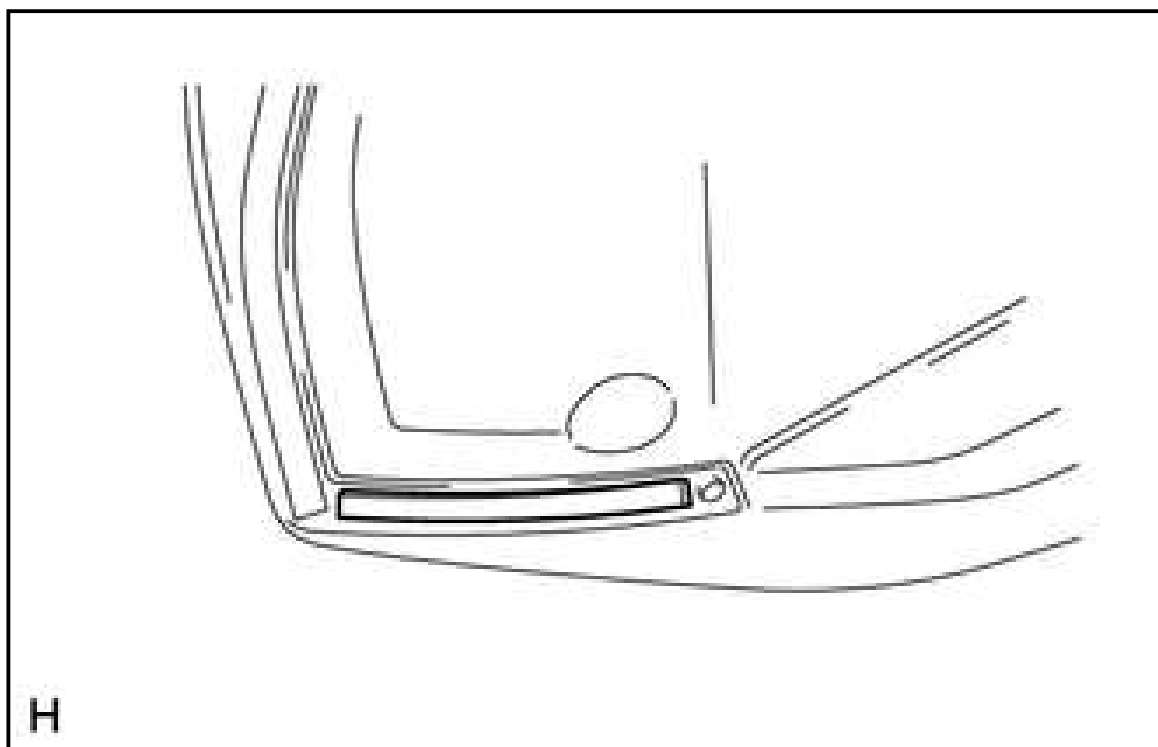


a. Remove the rear spoiler protector.

4. REMOVE CENTER STOP LIGHT ASSEMBLY

Refer to [PROCEDURE - Step 1](#)

5. REMOVE NO. 3 BACK DOOR WIRE

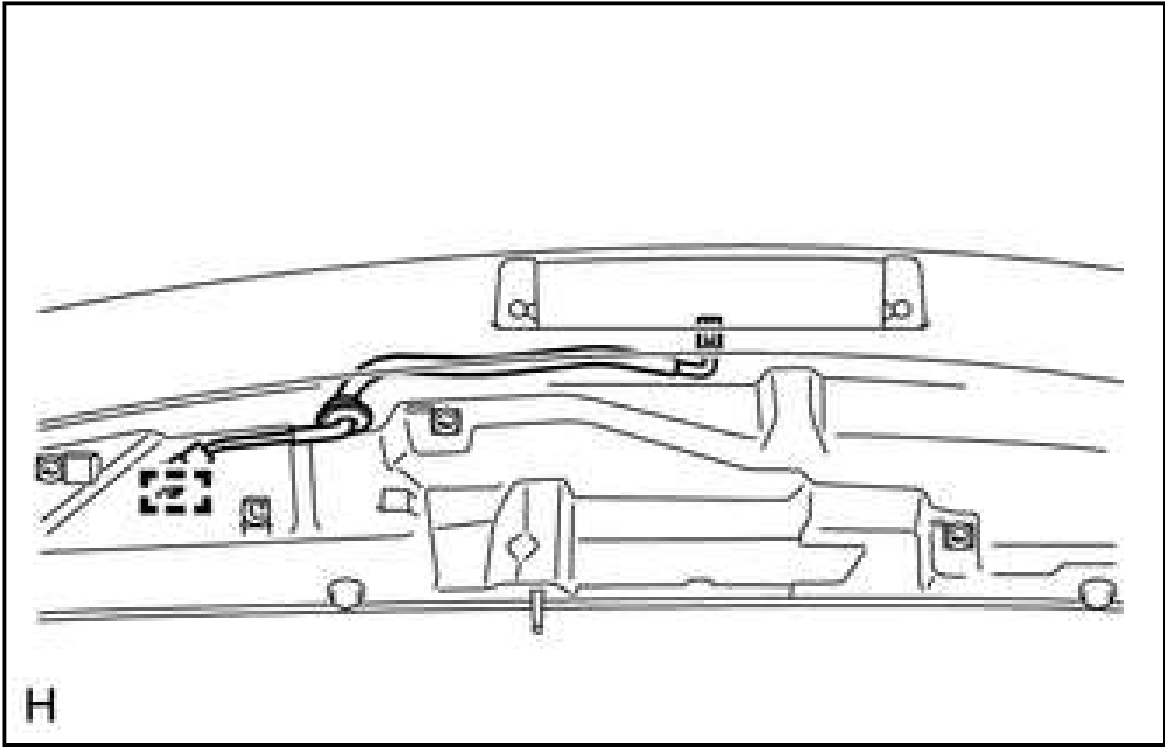

a. Detach the clamp and remove the No. 3 back door wire.

REASSEMBLY [08/2015 -]

CAUTION / NOTICE / HINT

HINT:

When installing the rear spoiler protector, heat the rear spoiler surface using a heat light.

Standard

Item	Temperature
Rear Spoiler	20 to 30°C (68 to 86°F)

PROCEDURE

1. INSTALL NO. 3 BACK DOOR WIRE

a. Attach the clamp to install the No. 3 back door wire.


2. INSTALL CENTER STOP LIGHT ASSEMBLY

Refer to [PROCEDURE - Step 1](#)

3. INSTALL REAR SPOILER PROTECTOR LH

HINT:

Use the same procedure to install the rear spoiler protector on the other side.

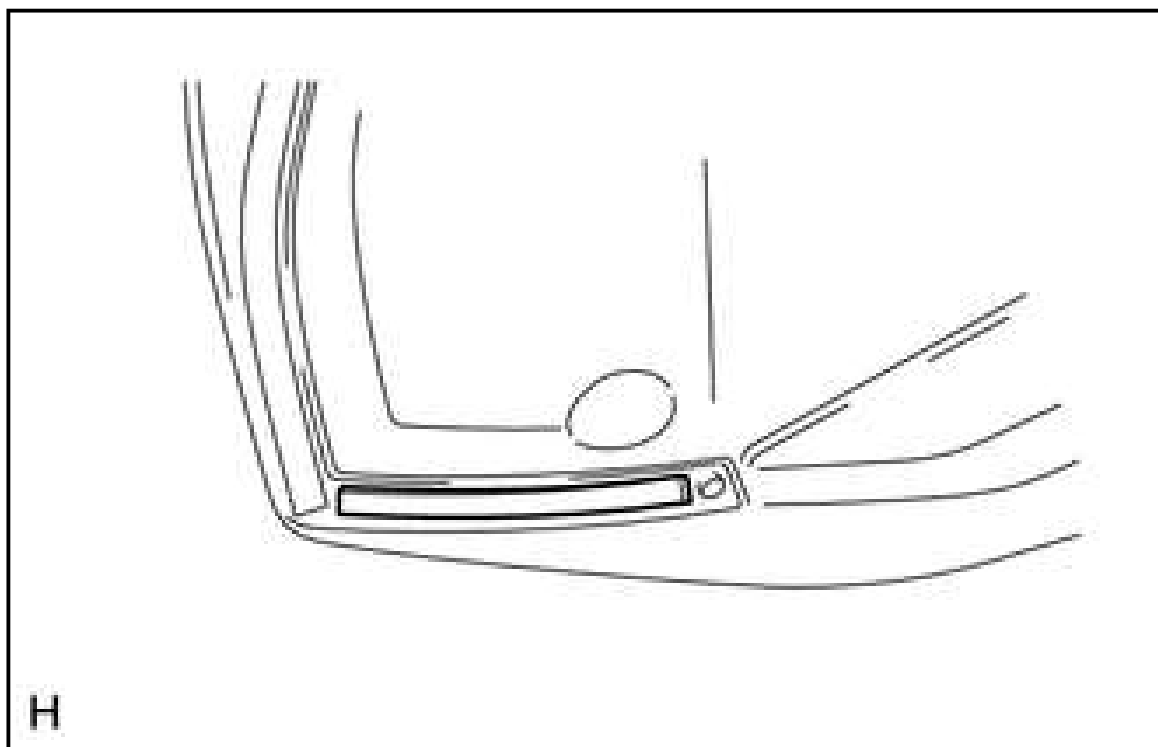

- a. Clean the rear spoiler surface.
 1. Using a heat light, heat the rear spoiler surface.
 2. Remove the double-sided tape from the rear spoiler surface.
 3. Wipe off any tape adhesive residue with cleaner.
- b. Install a new rear spoiler protector.
 1. Remove the peeling paper from the face of a new rear spoiler protector.

HINT:

After removing the peeling paper, keep the exposed adhesive free from foreign matter.


2. Install the rear spoiler protector as shown in the illustration.

4. INSTALL REAR NO. 2 SPOILER PROTECTOR

HINT:

Use the same procedure to install the rear No. 2 spoiler protector on the other side.



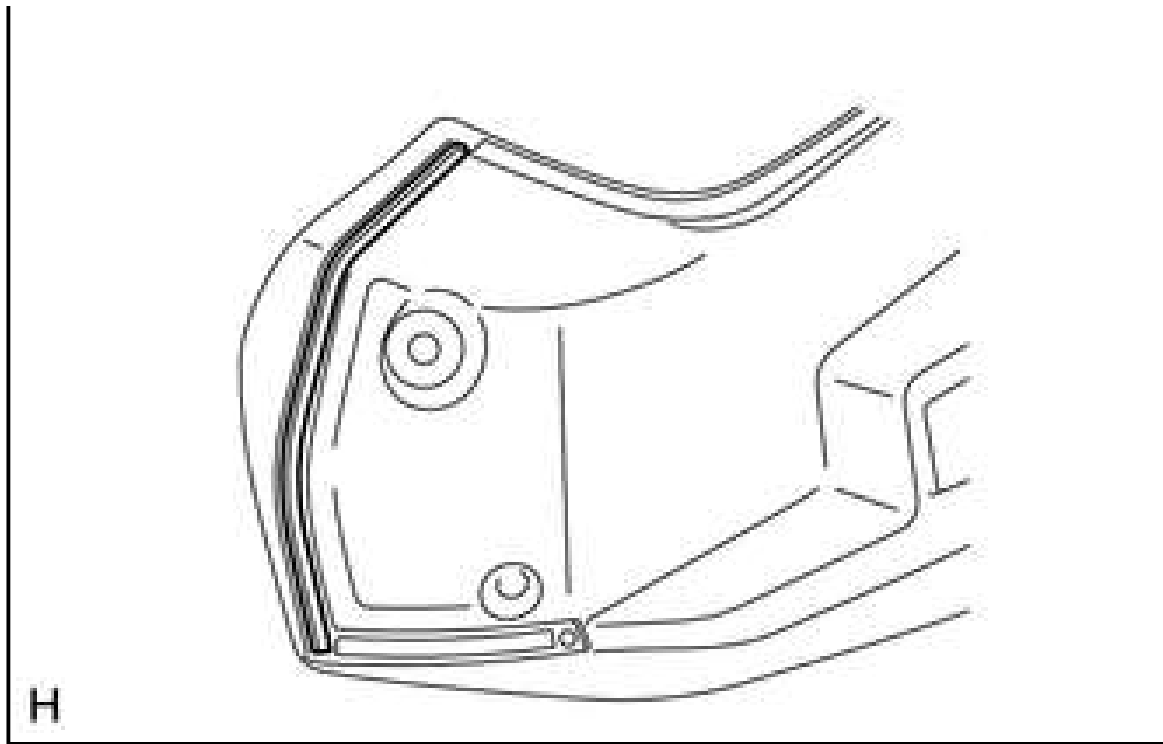

- a. Clean the rear spoiler surface.
 1. Using a heat light, heat the rear spoiler surface.
 2. Remove the double-sided tape from the rear spoiler surface.
 3. Wipe off any tape adhesive residue with cleaner.
- b. Install a new rear No. 2 spoiler protector.
 1. Remove the peeling paper from the face of a new rear No. 2 spoiler protector.

HINT:

After removing the peeling paper, keep the exposed adhesive free from foreign matter.


2. Install the rear No. 2 spoiler protector as shown in the illustration.

5. INSTALL REAR NO. 1 SPOILER PROTECTOR

HINT:

Use the same procedure to install the No. 1 rear spoiler protector on the other side.



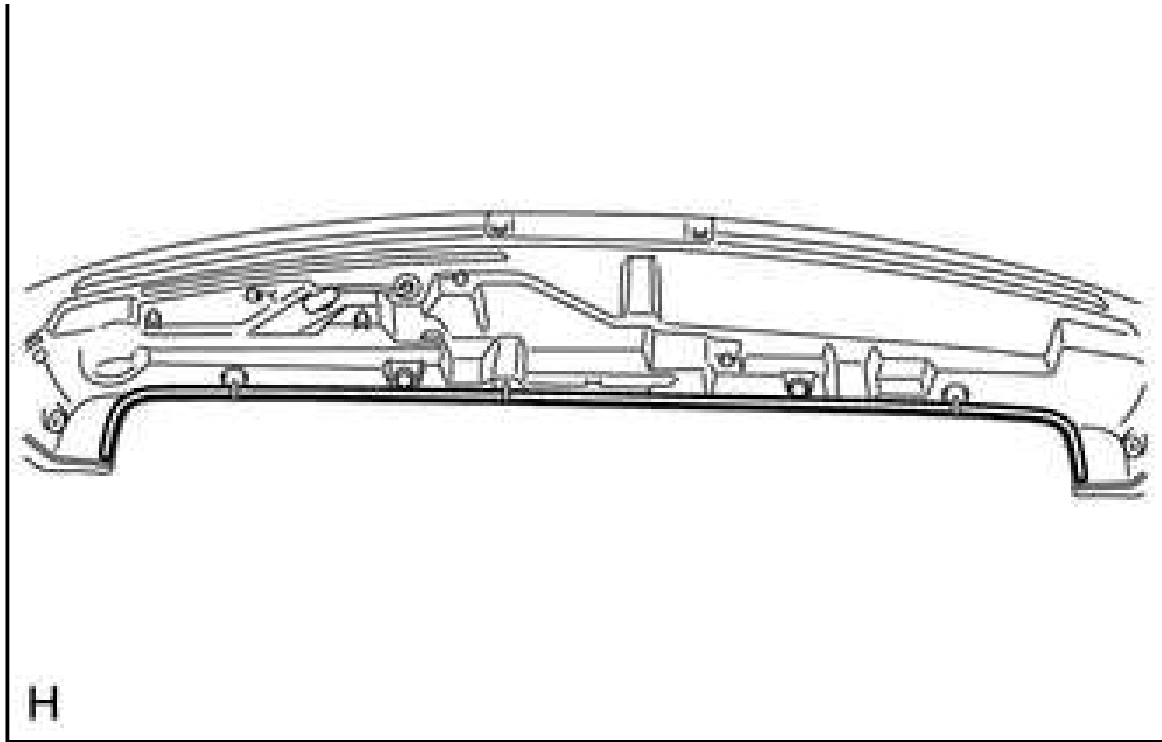

- a. Clean the rear spoiler surface.
 1. Using a heat light, heat the rear spoiler surface.
 2. Remove the double-sided tape from the rear spoiler surface.
 3. Wipe off any tape adhesive residue with cleaner.
- b. Install a new rear No. 1 spoiler protector.
 1. Remove the peeling paper from the face of a new rear No. 1 spoiler protector.

HINT:

After removing the peeling paper, keep the exposed adhesive free from foreign matter.

2. Install the rear No. 1 spoiler protector as shown in the illustration.

INSTALLATION [08/2015 -]

CAUTION / NOTICE / HINT

HINT:

A bolt without a torque specification is shown in the standard bolt chart (Refer to [**SPECIFIED TORQUE FOR STANDARD BOLTS \[08/2015 - \]**](#)).

PROCEDURE

1. INSTALL REAR NO. 2 SPOILER CLIP

HINT:

Use the same procedure to install the rear No. 2 spoiler clip on the other side.

- a. Attach the 2 claws to install a new rear No. 2 spoiler clip.

2. INSTALL REAR SPOILER SUB-ASSEMBLY

- a. Attach the 3 claws to install the rear spoiler.