



15. Tire and Disc Wheel


Newly designed 16-inch, 17-inch and 18-inch disc wheels are provided.

Tire Size	P245/75R16	265/70R16
Disc Wheel Size	16 × 7J	16 × 7J
Disc Wheel Material	Aluminum	←
P.C.D.*	139.7 mm (5.5 in.)	←
Inset	25 mm (0.98 in.)	←
Wheel Design	 26L0CH47H	 26L0CH48H

*: Pitch Circle Diameter

Tire Size	P265/65R17
Disc Wheel Size	17 × 7.5J
Disc Wheel Material	Aluminum
P.C.D.*	139.7 mm (5.5 in.)
Inset	30 mm (1.18 in.)
Wheel Design	 26L0CH49H


*: Pitch Circle Diameter

Tire Size	P265/60R18
Disc Wheel Size	18 × 7.5J
Disc Wheel Material	Aluminum
P.C.D.*	139.7 mm (5.5 in.)
Inset	25 mm (1.18 in.)
Wheel Design	 26L0CH50


*: Pitch Circle Diameter

16. Brake

- A center floor hand lever type parking brake has been adopted for all models, instead of the stick lever type and foot pedal type parking brakes used in the previous models.

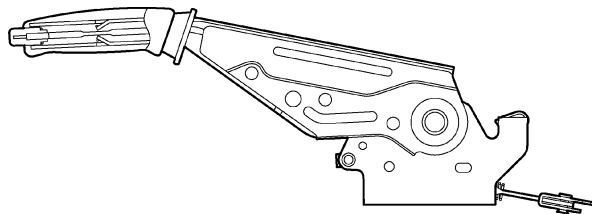

'16 TACOMA

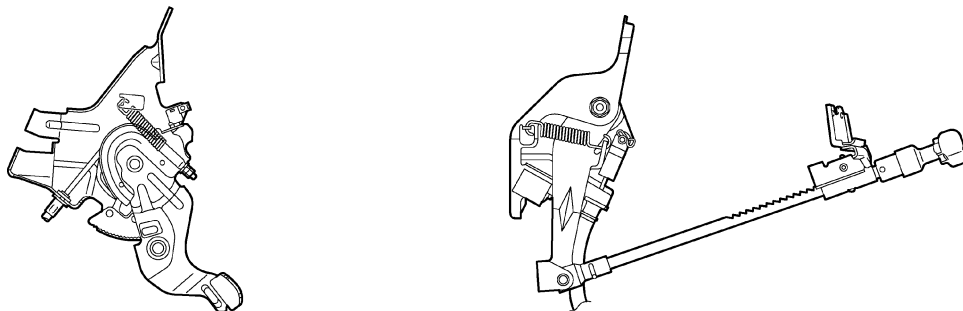

'15 TACOMA

26L0CH129H

- A 10-inch brake booster has been adopted for the models equipped with 2GR-FKS engine and vacuum brake booster.
- A hill-start assist control has been adopted for the models equipped with vacuum brake booster.